



Material:
PVC/Silicon Optional



Waterproof Rating:
IP68



Bending Direction:
Vertical



Beam Angle:
120°



Min. Bending:
150mm



Installation Temp:
0°C - 50°C



Operating Temp:
-25°C - 50°C






Weight:
0.15kg/m



Dimmable:
DALI, 0-10V, DMX, Triac



CRI:
>80+

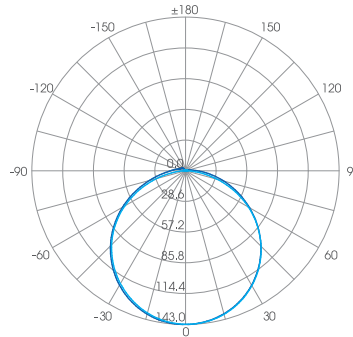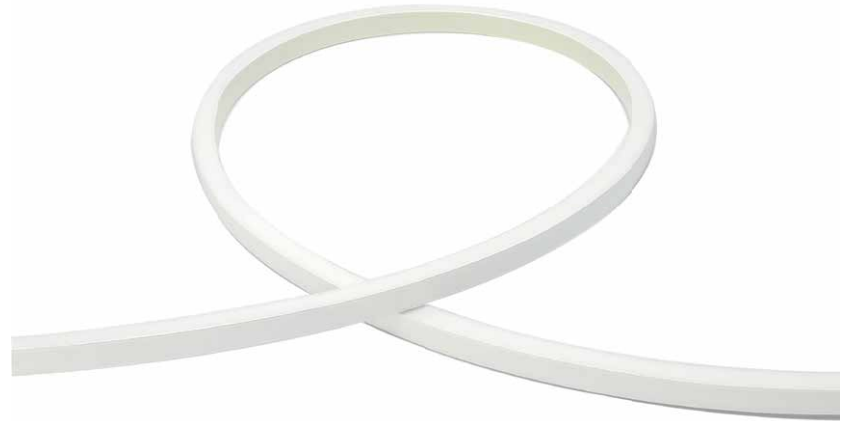

H²O FLEX-10 STATIC COLOUR

ILFX10-24-10W-120-V


Available Colours

Input Voltage:	24V	2200K - 500lm/m	Blue	105lm/m
Watts/m:	10W	2700K - 500lm/m	Green	580lm/m
Dimming:	YES	3000K - 520lm/m	Red	220lm/m
Beam Angle:	120	3500K - 520lm/m		
LED Chips/m:	120	4000K - 520lm/m		
Cutting Length (LED QTY):	12	4500K - 530lm/m		
Cutting Length (mm):	100	5000K - 530lm/m		
Max Length (One Feed/m):	5	6500K - 530lm/m		




ALUMINIUM MOUNTING PROFILE

ALU10-S-HV

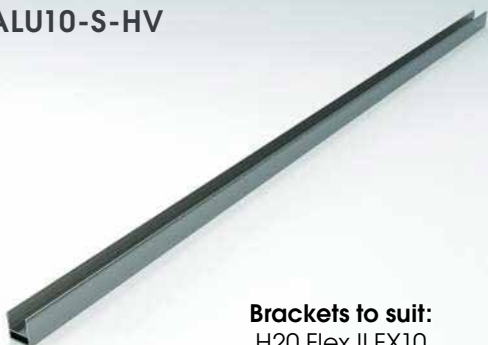


Brackets to suit:
H2O Flex ILFX10


Dimensions



Mounting




Surface Mounted




Recessed

ALU10-S-V-FLX

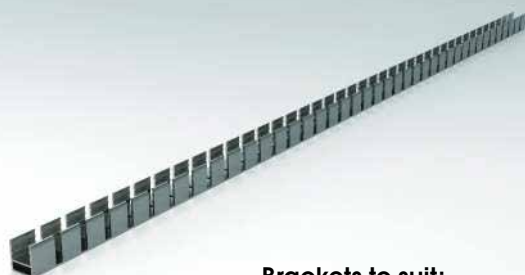


Brackets to suit:
H2O Flex ILFX10

Dimensions



Mounting



Surface Mounted