



**Material:**  
PVC/Silicon Optional



**Waterproof Rating:**  
IP68



**Bending Direction:**  
Horizontal



**Beam Angle:**  
120°



**Min. Bending:**  
80mm



**Installation Temp:**  
0°C – 50°C



**Operating Temp:**  
-25°C – 50°C





**Weight:**  
0.165kg/m



**Dimmable:**  
DALI, 0-10V, DMX, Triac



**CRI:**  
>80+

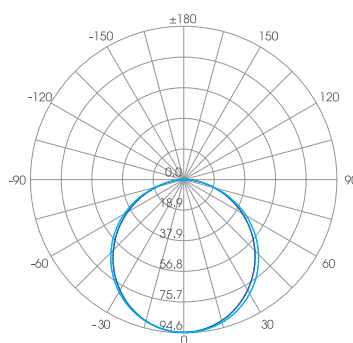

## H<sup>2</sup>O FLEX-30 STATIC COLOUR

### ILFX30-24-5W-120-H

Input Voltage:	24V
Watts/m:	5W
Dimming:	YES
Beam Angle:	120
LED Chips/m:	70
Cutting Length (LED QTY):	7
Cutting Length (mm):	100
Max Length (One Feed/m):	10

### Available Colours

2200K - 150lm/m	Blue	35lm/m
2700K - 150lm/m	Green	200lm/m
3000K - 170lm/m	Red	50lm/m
3500K - 170lm/m		
4000K - 180lm/m		
4500K - 180lm/m		
5000K - 190lm/m		
6500K - 190lm/m		

### ILFX30-24-10W-120-H

Input Voltage:	24V
Watts/m:	10W
Dimming:	YES
Beam Angle:	120
LED Chips/m:	120
Cutting Length (LED QTY):	12
Cutting Length (mm):	100
Max Length (One Feed/m):	10


### Available Colours

2200K - 240lm/m	Amber	80lm/m
2700K - 240lm/m	Blue	37lm/m
3000K - 260lm/m	Green	225lm/m
3500K - 260lm/m	Lemon Yellow	110lm/m
4000K - 280lm/m	Orange	65lm/m
4500K - 280lm/m	Pink	70lm/m
5000K - 280lm/m	Red	84lm/m
6500K - 280lm/m		




## ALUMINIUM MOUNTING PROFILE

ALU30-S-H

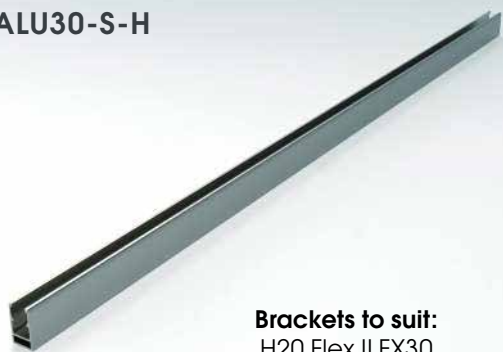


**Brackets to suit:**  
H2O Flex ILFX30


## Dimensions

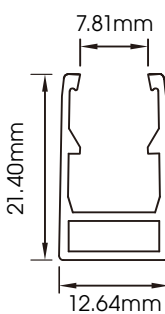

## Mounting



Surface Mounted



Recessed