



Material:
PVC/Silicon Optional



Waterproof Rating:
IP68



Bending Direction:
Vertical



Beam Angle:
120°



Min. Bending:
80mm



Installation Temp:
0°C - 50°C



Operating Temp:
-25°C - 50°C





Weight:
0.30kg/m



Dimmable:
DALI, 0-10V, DMX, Triac



CRI:
>80+

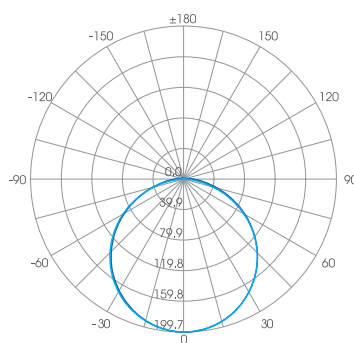

H²O FLEX-40 STATIC COLOUR

ILFX40-24-10W-120-V


Available Colours

Input Voltage:	24V	2200K - 430lm/m	Blue	95lm/m
Watts/m:	10W	2700K - 430lm/m	Green	550lm/m
Dimming:	YES	3000K - 450lm/m	Red	175lm/m
Beam Angle:	120	3500K - 450lm/m		
LED Chips/m:	144	4000K - 460lm/m		
Cutting Length (LED QTY):	12	4500K - 460lm/m		
Cutting Length (mm):	83.3	5000K - 480lm/m		
Max Length (One Feed/m):	10	6500K - 480lm/m		




ALUMINIUM MOUNTING PROFILE

ALU40-S-V

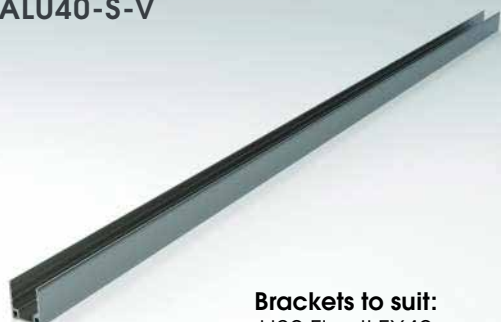


Brackets to suit:
H2O Flex ILFX40


Dimensions



Mounting




Surface Mounted




Recessed

ALU40-S-V-FLX

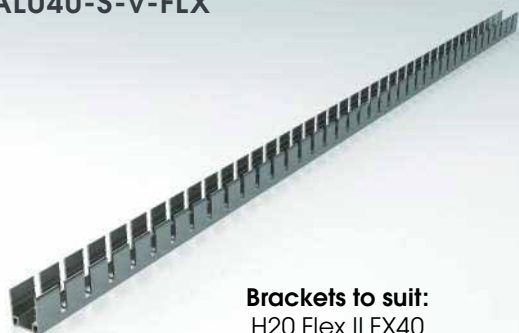


Brackets to suit:
H2O Flex ILFX40

Dimensions



Mounting



Surface Mounted