



**Material:**  
PVC/Silicon Optional



**Waterproof Rating:**  
IP68



**Bending Direction:**  
Vertical



**Beam Angle:**  
120°



**Min. Bending:**  
120mm



**Installation Temp:**  
0°C - 50°C



**Operating Temp:**  
-25°C - 50°C





**Weight:**  
0.43kg/m



**Dimmable:**  
DALI, 0-10V, DMX, Triac



**CRI:**  
>80+

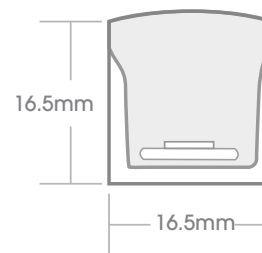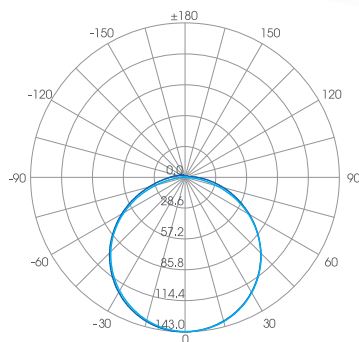

## H<sup>2</sup>O FLEX-60 STATIC COLOUR

### ILFX60-24-9W-120-V

Input Voltage:	24V
Watts/m:	9W
Dimming:	YES
Beam Angle:	120
LED Chips/m:	120
Cutting Length (LED QTY):	12
Cutting Length (mm):	100
Max Length (One Feed/m):	10

### Available Colours

2200K - 350lm/m	Amber	90lm/m
2700K - 350lm/m	Blue	60lm/m
3000K - 360lm/m	Green	320lm/m
3500K - 360lm/m	Orange	80lm/m
4000K - 380lm/m	Pink	190lm/m
5000K - 400lm/m	Red	110lm/m
6500K - 400lm/m		

### ILFX60-24-10W-120-V

Input Voltage:	24V
Watts/m:	10W
Dimming:	YES
Beam Angle:	120
LED Chips/m:	144
Cutting Length (LED QTY):	12
Cutting Length (mm):	83.3
Max Length (One Feed/m):	10

### Available Colours

2200K - 400lm/m	Amber	110lm/m
2700K - 420lm/m	Blue	72lm/m
3000K - 450lm/m	Green	390lm/m
3500K - 450lm/m	Orange	80lm/m
4000K - 460lm/m	Pink	190lm/m
4500K - 460lm/m	Red	120lm/m
5000K - 470lm/m		
6500K - 470lm/m		



## H<sup>2</sup>O FLEX-60 TUNABLE WHITE

### ILFX60-24-15W-120-V-TW

Input Voltage:	24V
Watts/m:	15W
Dimming:	YES
Beam Angle:	120
LED Chips/m:	120
Cutting Length (LED QTY):	12
Cutting Length (mm):	100
Max Length (One Feed/m):	10

### Available Colours

2200K+5700K - 260lm/m+330lm/m  
 2700K+5700K - 280lm/m+330lm/m  
 3000K+5700K - 280lm/m+330lm/m

## H<sup>2</sup>O FLEX-60 RGB

### ILFX60-24-13W-120-V-RGB

Input Voltage:	24V
Watts/m:	13W
Dimming:	YES
Beam Angle:	120
LED Chips/m:	72
Cutting Length (LED QTY):	6
Cutting Length (mm):	83.3
Max Length (One Feed/m):	10

### Available Colours

R: 80lm/m, G: 205lm/m, B: 54lm/m

## H<sup>2</sup>O FLEX-60 RGB/W

### ILFX60-24-17W-V-120-RGBW

Input Voltage:	24V
Watts/m:	17W
Dimming:	YES
Beam Angle:	120
LED Chips/m:	72
Cutting Length (LED QTY):	6
Cutting Length (mm):	83.3
Max Length (One Feed/m):	8

### Available Colours

R: 18lm/m, G: 173lm/m, B: 41lm/m  
 RGBW (2700K)- 260lm/m  
 RGBW (3000K)- 270lm/m  
 RGBW (4000K)- 288lm/m  
 RGBW (5000K)- 300lm/m



## H<sup>2</sup>O FLEX-60 DYNAMIC COLOUR CONTROL

### ILFX60-24-15W-120-V-RGB-DMX

#### Available Colours

Input Voltage:	24V	R: 33lm/m, G: 100lm/m, B: 21lm/m
Watts/m:	15W	
Dimming:	DMX	
Beam Angle:	120	
LED Chips/m:	70	
Cutting Length (LED QTY):	7	
Cutting Length (mm):	100	
Max Length (One Feed/m):	8	











### ILFX60-24-18W-120-V-RGBW-DMX

#### Available Colours

Input Voltage:	24V	R: 33lm/m, G: 100lm/m, B: 21lm/m
Watts/m:	18W	RGBW (2700K)- 120lm/m
Dimming:	DMX	RGBW (3000K)- 130lm/m
Beam Angle:	120	RGBW (4000K)- 140lm/m
LED Chips/m:	70	RGBW (5000K)- 160lm/m
Cutting Length (LED QTY):	7	
Cutting Length (mm):	100	
Max Length (One Feed/m):	8	







ALUMINIUM MOUNTING PROFILE

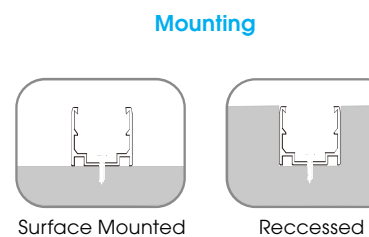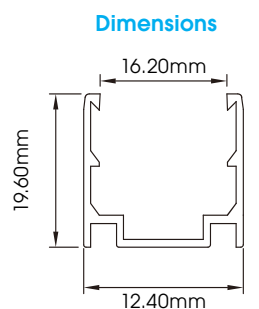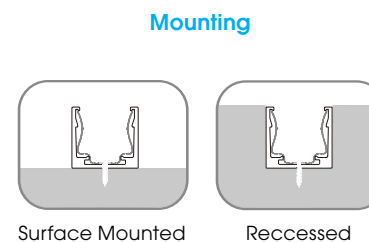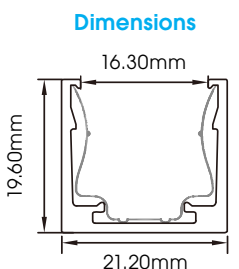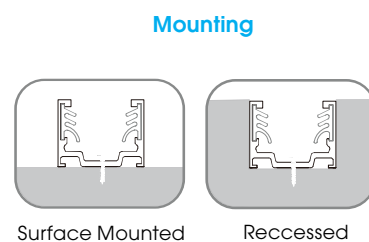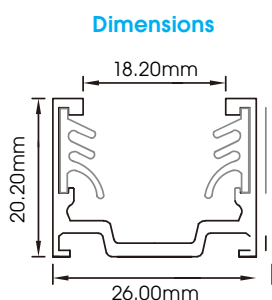
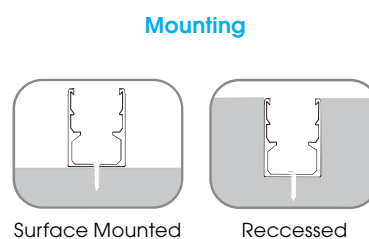
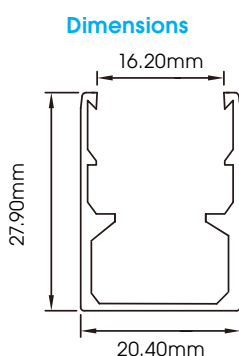
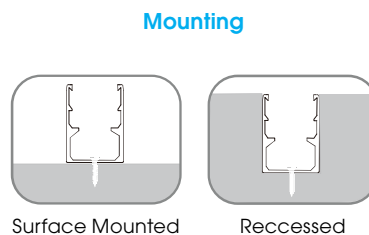
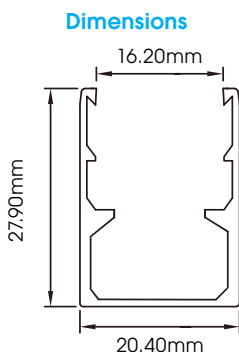




## FLEXIBLE & RIGID ALUMINIUM MOUNTING PROFILE

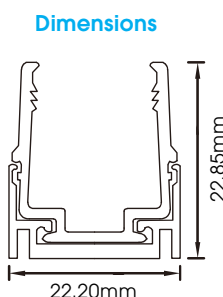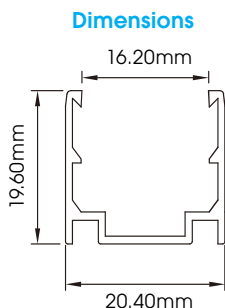


## PLASTIC MOUNTING PROFILE

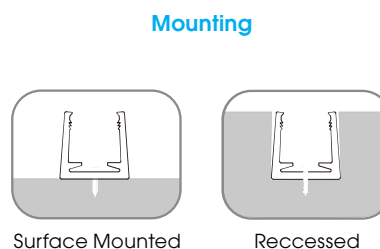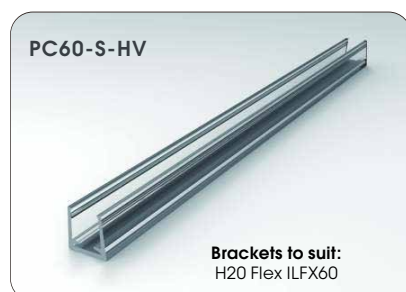





## FLEXIBLE STAINLESS STEEL MOUNTING BRACKETS

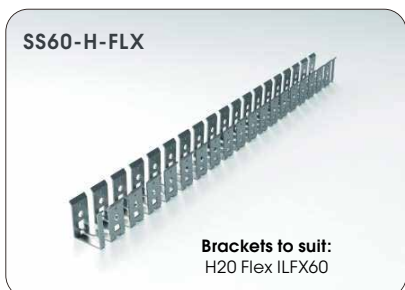


**Dimensions**




**Mounting**




Surface Mounted

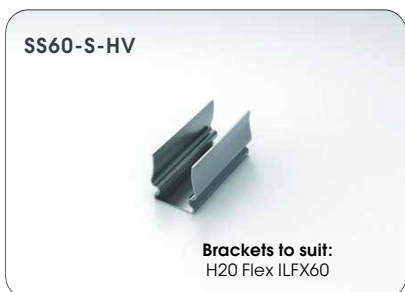


**Dimensions**



**Mounting**



Surface Mounted



Recessed