



Material:
PVC/Silicon Optional



Waterproof Rating:
IP68



Bending Direction:
Horizontal



Beam Angle:
120°



Min. Bending:
150mm



Installation Temp:
0°C - 50°C



Operating Temp:
-25°C - 50°C





Weight:
0.43kg/m



Dimmable:
DALI, 0-10V, DMX, Triac



CRI:
>80+

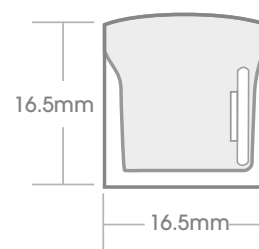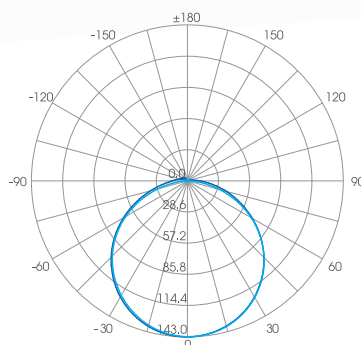

H₂O FLEX-70 STATIC COLOUR

ILFX70-24-10W-120-H







Input Voltage:	24V
Watts/m:	10W
Dimming:	YES
Beam Angle:	120
LED Chips/m:	120
Cutting Length (LED QTY):	12
Cutting Length (mm):	100
Max Length (One Feed/m):	5

Available Colours







2200K - 490lm/m	Blue	73lm/m
2700K - 490lm/m	Green	300lm/m
3000K - 510lm/m	Red	120lm/m
3500K - 510lm/m		
4000K - 520lm/m		
4500K - 520lm/m		
5000K - 540lm/m		
6500K - 540lm/m		



ALUMINIUM MOUNTING PROFILE

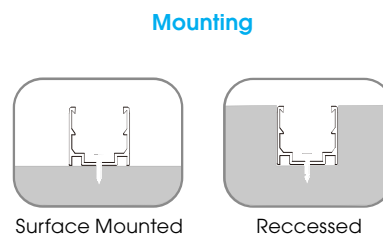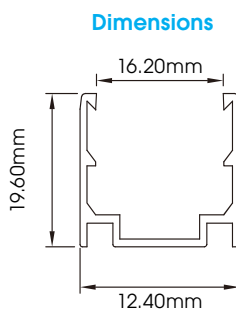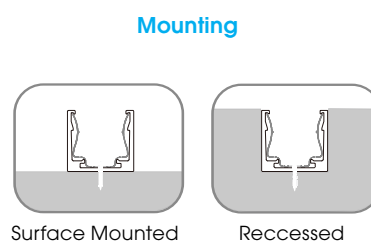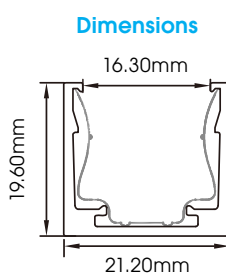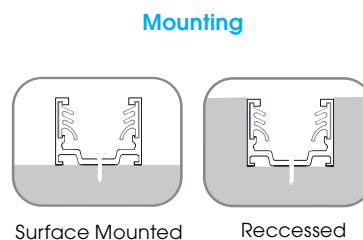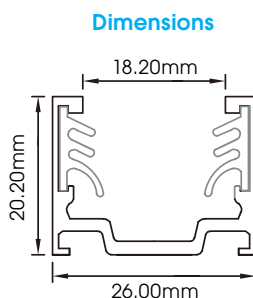

FLEXIBLE & RIGID ALUMINIUM MOUNTING PROFILE

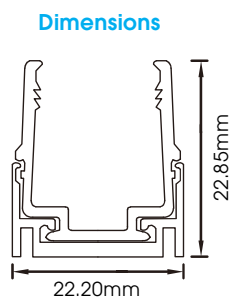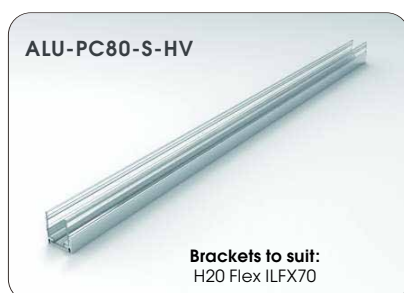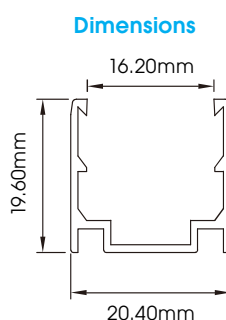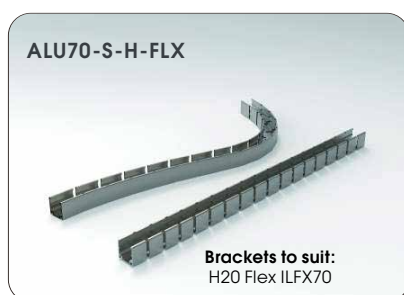






PLASTIC MOUNTING PROFILE




Dimensions

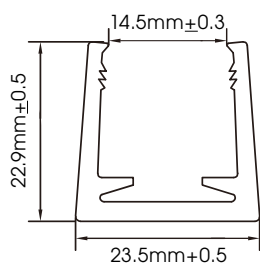


Mounting




Dimensions

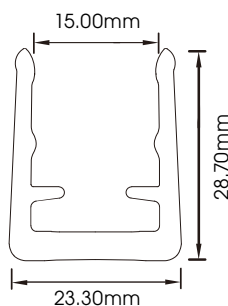


Mounting




FLEXIBLE STAINLESS STEEL MOUNTING BRACKETS

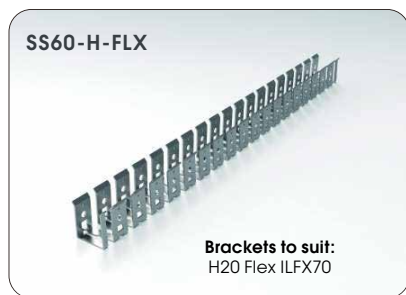


Dimensions

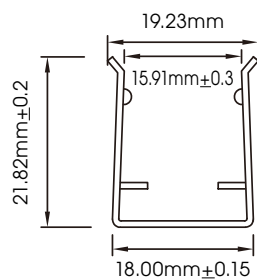

Mounting



Dimensions

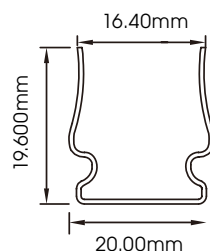

Mounting

