

Specification options

SYSTEM POWER

15W
21W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 90

ELECTRICAL

Non-Dim
phase DIM
1-10V
DALI

PRIMARY REFLECTOR



28° Beam 35° Beam



50° Beam

TRIM



Standard

TRIMLESS



TL Version

SECONDARY REFLECTOR




Specular Black White



Matt

ILD-PRO100F

3000K
(Standard)

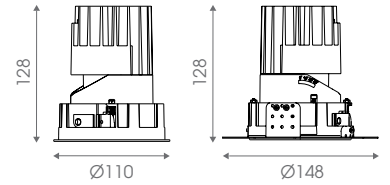


Light distribution for 3000K

13W 900lm - 950lm




ILD-PRO100-F-13W-930-28
ILD-PRO100-F-13W-940-28



20° 10° 0° 10° 20°




ILD-PRO100-F-13W-930-35
ILD-PRO100-F-13W-940-35



20° 10° 0° 10° 20°



ILD-PRO100-F-13W-930-50
ILD-PRO100-F-13W-940-50



20° 10° 0° 10° 20°

Specification Information


ILD-PRO100F 13W 900-950lm

ILD-PRO-FIXED	LED Output	Module Output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ILD-PRO100-F-13W-930-28	1300lm	900lm	36V	350mA	13W	15W	90	3000K	28°
ILD-PRO100-F-13W-940-28	1400lm	950lm	36V	350mA	13W	15W	90	4000K	28°
ILD-PRO100-F-13W-930-35	1300lm	900lm	36V	350mA	13W	15W	90	3000K	35°
ILD-PRO100-F-13W-940-35	1400lm	950lm	36V	350mA	13W	15W	90	4000K	35°
ILD-PRO100-F-13W-930-50	1300lm	900lm	36V	350mA	13W	15W	90	3000K	50°
ILD-PRO100-F-13W-940-50	1400lm	950lm	36V	350mA	13W	15W	90	4000K	50°

18W 1200lm-1300lm




ILD-PRO100-F-18W-930-28
ILD-PRO100-F-18W-940-28



20° 10° 0° 10° 20°




ILD-PRO100-F-18W-930-35
ILD-PRO100-F-18W-940-35



20° 10° 0° 10° 20°



ILD-PRO100-F-18W-930-50
ILD-PRO100-F-18W-940-50



20° 10° 0° 10° 20°

Specification Information

ILD-PRO100F 18W 1200-1300 lm

ILD-PRO-FIXED	LED Output	Module Output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ILD-PRO100-F-18W-930-28	1700lm	1200lm	36V	500mA	18W	21W	90	3000K	28°
ILD-PRO100-F-18W-940-28	1800lm	1300lm	36V	500mA	18W	21W	90	4000K	28°
ILD-PRO100-F-18W-930-35	1700lm	1200lm	36V	500mA	18W	21W	90	3000K	35°
ILD-PRO100-F-18W-940-35	1800lm	1300lm	36V	500mA	18W	21W	90	4000K	35°
ILD-PRO100-F-18W-930-50	1700lm	1200lm	36V	500mA	18W	21W	90	3000K	50°
ILD-PRO100-F-18W-940-50	1800lm	1300lm	36V	500mA	18W	21W	90	4000K	50°