

Specification options

SYSTEM POWER

21W  
28W

COLOUR TEMPERATURE

2700K  
3000K  
4000K

COLOUR RENDERING INDEX

CRI 90

ELECTRICAL

Non-DIM  
phase DIM  
1-10V  
DALI

PRIMARY REFLECTOR



20° Beam 40° Beam



50° Beam

TRIM



Standard

TRIMLESS



TL Version

ANTI-GLARE ACCESSORY



Honeycomb Louvre


SECONDARY REFLECTOR



Matt Black White




Specular



ILD-PRO125A

3000K  
(Standard)

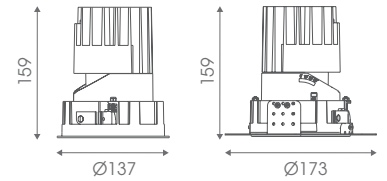


Light distribution for 3000K


18W 1300lm - 1400lm




ILD-PRO125-A-18W-930-20  
ILD-PRO125-A-18W-940-20



ILD-PRO125-A-18W-930-40  
ILD-PRO125-A-18W-940-40



ILD-PRO125-A-18W-930-50  
ILD-PRO125-A-18W-940-50



Specification Information


ILD-PRO125A 18W 1300-1400 lm

ILD-PRO-ADJUSTABLE	LED Output	Module Output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ILD-PRO125-A-18W-930-20	2000lm	1300lm	36V	500mA	18W	21W	90	3000K	20°
ILD-PRO125-A-18W-940-20	2100lm	1400lm	36V	500mA	18W	21W	90	4000K	20°
ILD-PRO125-A-18W-930-40	2000lm	1300lm	36V	500mA	18W	21W	90	3000K	40°
ILD-PRO125-A-18W-940-40	2100lm	1400lm	36V	500mA	18W	21W	90	4000K	40°
ILD-PRO125-A-18W-930-50	2000lm	1300lm	36V	500mA	18W	21W	90	3000K	50°
ILD-PRO125-A-18W-940-50	2100lm	1400lm	36V	500mA	18W	21W	90	4000K	50°


25W 1700lm - 1800lm




ILD-PRO125-A-25W-930-20  
ILD-PRO125-A-25W-940-20



ILD-PRO125-A-25W-930-40  
ILD-PRO125-A-25W-940-40



ILD-PRO125-A-25W-930-50  
ILD-PRO125-A-25W-940-50



Specification Information

ILD-PRO125A 25W 1700-1800 lm

ILD-PRO-ADJUSTABLE	LED Output	Module Output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ILD-PRO125-A-25W-930-20	2600lm	1700lm	36V	700mA	25W	28W	90	3000K	20°
ILD-PRO125-A-25W-940-20	2700lm	1800lm	36V	700mA	25W	28W	90	4000K	20°
ILD-PRO125-A-25W-930-40	2600lm	1700lm	36V	700mA	25W	28W	90	3000K	40°
ILD-PRO125-A-25W-940-40	2700lm	1800lm	36V	700mA	25W	28W	90	4000K	40°
ILD-PRO125-A-25W-930-50	2600lm	1700lm	36V	700mA	25W	28W	90	3000K	50°
ILD-PRO125-A-25W-940-50	2700lm	1800lm	36V	700mA	25W	28W	90	4000K	50°