

Specification options

SYSTEM POWER

21W
28W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 90

ELECTRICAL

Non-Dim
phase DIM
1-10V
DALI

PRIMARY REFLECTOR



TRIM



TRIMLESS




SECONDARY REFLECTOR




ILD-PRO125F

3000K
(Standard)

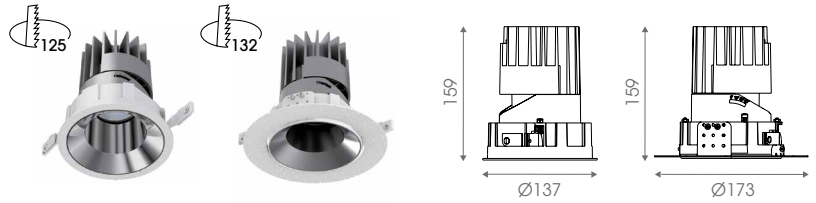

Light distribution for 3000K

18W 1400lm-1500lm

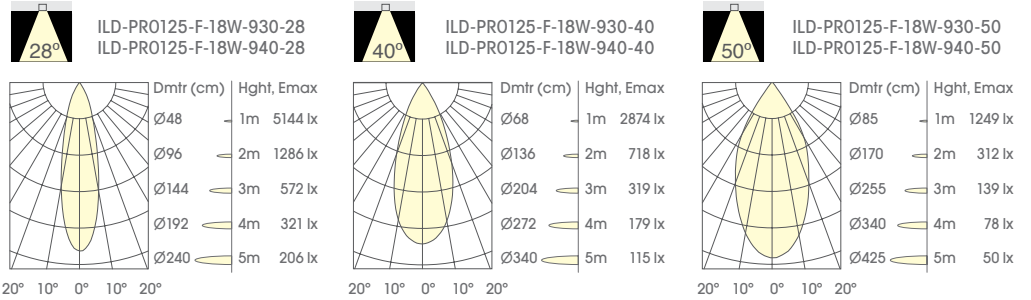


Specification Information

ILD-PRO125F 18W 1400-1500 lm

ILD-PRO-FIXED	LED Output	Module Output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ILD-PRO125-F-18W-930-28	2000lm	1400lm	36V	500mA	18W	21W	90	3000K	28°
ILD-PRO125-F-18W-940-28	2100lm	1500lm	36V	500mA	18W	21W	90	4000K	28°
ILD-PRO125-F-18W-930-40	2000lm	1400lm	36V	500mA	18W	21W	90	3000K	40°
ILD-PRO125-F-18W-940-40	2100lm	1500lm	36V	500mA	18W	21W	90	4000K	40°
ILD-PRO125-F-18W-930-50	2000lm	1400lm	36V	500mA	18W	21W	90	3000K	50°
ILD-PRO125-F-18W-940-50	2100lm	1500lm	36V	500mA	18W	21W	90	4000K	50°

25W 1800lm-1900lm

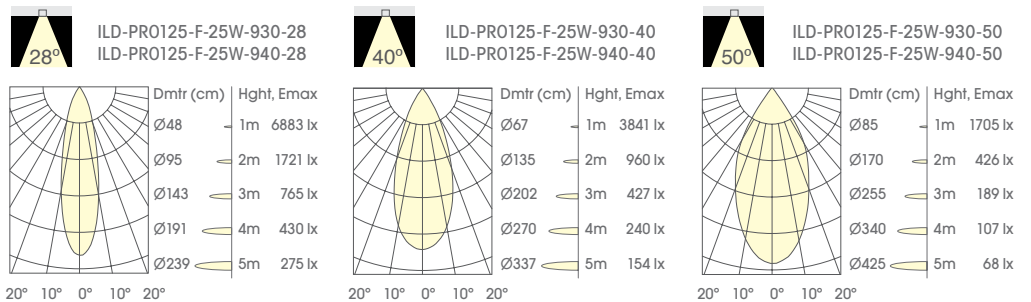

Specification Information

ILD-PRO125F 25W 1800-1900 lm

ILD-PRO-FIXED	LED Output	Module Output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ILD-PRO125-F-25W-930-28	2600lm	1800lm	36V	700mA	25W	28W	90	3000K	28°
ILD-PRO125-F-25W-940-28	2700lm	1900lm	36V	700mA	25W	28W	90	4000K	28°
ILD-PRO125-F-25W-930-40	2600lm	1800lm	36V	700mA	25W	28W	90	3000K	40°
ILD-PRO125-F-25W-940-40	2700lm	1900lm	36V	700mA	25W	28W	90	4000K	40°
ILD-PRO125-F-25W-930-50	2600lm	1800lm	36V	700mA	25W	28W	90	3000K	50°
ILD-PRO125-F-25W-940-50	2700lm	1900lm	36V	700mA	25W	28W	90	4000K	50°