

Specification options

SYSTEM POWER

21W
28W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 90

ELECTRICAL

Non-Dim
phase DIM
1-10V
DALI

TRIM



Standard

TRIMLESS




TL Version

ILDSQ-PRO125-WW

3000K
(Standard)

122x122

130x130

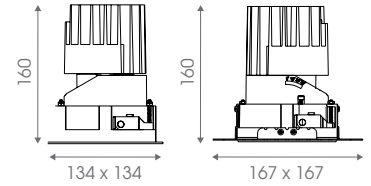


Light distribution for 3000K

18W 680lm-750lm



ILDSQ-PRO125-WW-18W-930
ILDSQ-PRO125-WW-18W-940

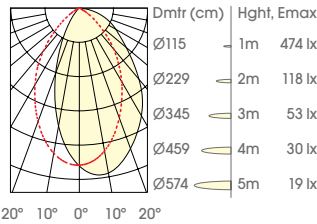

Specification Information


ILDSQ-PRO125-WW 18W 680-750lm

ILDSQ-PRO-WALLWASHER	LED Output	Module Output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT
ILDSQ-PRO125-WW-18W-930	2000lm	680lm	36V	500mA	18W	21W	90	3000K
ILDSQ-PRO125-WW-18W-940	2100lm	750lm	36V	500mA	18W	21W	90	4000K

25W 880lm-950lm



ILDSQ-PRO125-WW-25W-930
ILDSQ-PRO125-WW-25W-940

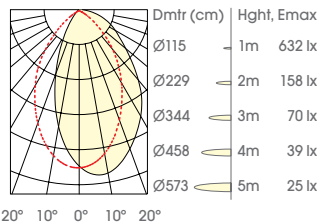

Specification Information

ILDSQ-PRO125-WW 25W 880-950 lm

ILDSQ-PRO-WALLWASHER	LED Output	Module Output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT
ILDSQ-PRO125-WW-25W-930	2600lm	880lm	36V	700mA	25W	28W	90	3000K
ILDSQ-PRO125-WW-25W-940	2700lm	950lm	36V	700mA	25W	28W	90	4000K