

Specification options

SYSTEM POWER

21W
28W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 90

ELECTRICAL

Non-Dim
phase DIM
1-10V
DALI

PRIMARY REFLECTOR




TRIM



TRIMLESS




SECONDARY REFLECTOR



ILDSQ-PRO125F

3000K
(Standard)

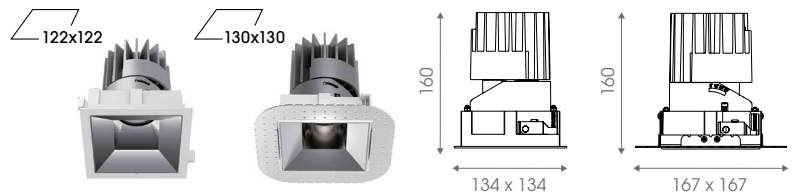


Light distribution for 3000K


18W 1400lm-1500lm




ILDSQ-PRO125-F-18W-930-28
ILDSQ-PRO125-F-18W-940-28



ILDSQ-PRO125-F-18W-930-40
ILDSQ-PRO125-F-18W-940-40



ILDSQ-PRO125-F-18W-930-50
ILDSQ-PRO125-F-18W-940-50



Specification Information


ILDSQ-PRO125F 18W 1400-1500 lm

| ILDSQ-PRO-FIXED | LED Output | Module Output | LED Voltage | LED Current | LED Power | System Power | CRI | CCT | BEAM |
|---------------------------|------------|---------------|-------------|-------------|-----------|--------------|-----|-------|------|
| ILDSQ-PRO125-F-18W-930-28 | 2000lm | 1400lm | 36V | 500mA | 18W | 21W | 90 | 3000K | 28° |
| ILDSQ-PRO125-F-18W-940-28 | 2100lm | 1500lm | 36V | 500mA | 18W | 21W | 90 | 4000K | 28° |
| ILDSQ-PRO125-F-18W-930-40 | 2000lm | 1400lm | 36V | 500mA | 18W | 21W | 90 | 3000K | 40° |
| ILDSQ-PRO125-F-18W-940-40 | 2100lm | 1500lm | 36V | 500mA | 18W | 21W | 90 | 4000K | 40° |
| ILDSQ-PRO125-F-18W-930-50 | 2000lm | 1400lm | 36V | 500mA | 18W | 21W | 90 | 3000K | 50° |
| ILDSQ-PRO125-F-18W-940-50 | 2100lm | 1500lm | 36V | 500mA | 18W | 21W | 90 | 4000K | 50° |


25W 1800lm-1900lm




ILDSQ-PRO125-F-25W-930-28
ILDSQ-PRO125-F-25W-940-28



ILDSQ-PRO125-F-25W-930-40
ILDSQ-PRO125-F-25W-940-40



ILDSQ-PRO125-F-25W-930-50
ILDSQ-PRO125-F-25W-940-50



Specification Information

ILDSQ-PRO125F 25W 1800-1900 lm

| ILDSQ-PRO-FIXED | LED Output | Module Output | LED Voltage | LED Current | LED Power | System Power | CRI | CCT | BEAM |
|---------------------------|------------|---------------|-------------|-------------|-----------|--------------|-----|-------|------|
| ILDSQ-PRO125-F-25W-930-28 | 2600lm | 1800lm | 36V | 700mA | 25W | 28W | 90 | 3000K | 28° |
| ILDSQ-PRO125-F-25W-940-28 | 2700lm | 1900lm | 36V | 700mA | 25W | 28W | 90 | 4000K | 28° |
| ILDSQ-PRO125-F-25W-930-40 | 2600lm | 1800lm | 36V | 700mA | 25W | 28W | 90 | 3000K | 40° |
| ILDSQ-PRO125-F-25W-940-40 | 2700lm | 1900lm | 36V | 700mA | 25W | 28W | 90 | 4000K | 40° |
| ILDSQ-PRO125-F-25W-930-50 | 2600lm | 1800lm | 36V | 700mA | 25W | 28W | 90 | 3000K | 50° |
| ILDSQ-PRO125-F-25W-940-50 | 2700lm | 1900lm | 36V | 700mA | 25W | 28W | 90 | 4000K | 50° |