

Order options

SYSTEM POWER

11W  
15W

COLOUR TEMPERATURE

3000K  
4000K

COLOUR RENDERING INDEX

CRI180  
CRI190

ELECTRICAL

Non-Dim  
Phase Dim  
1-10V  
DALI

LENS



60° Beam

REFLECTOR




Matt

White


Black

ILDSQ100

3000K  
(Standard)



IP54 UGR <19




Light distribution for 3000K

9W 900 lm – 950 lm



ILDSQ100-13W-830  
ILDSQ100-13W-840

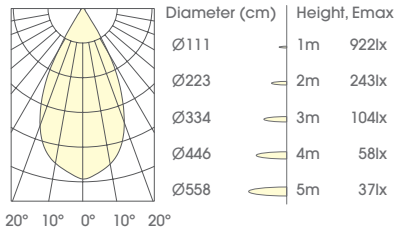

Specification Details


ILDSQ100-9W 900-950 Lm (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ILDSQ100-9W-830	1300 lm	900 lm	36 V	250 mA	9 W	11 W	80	3000K	60°
ILDSQ100-9W-840	1400 lm	950 lm	36 V	250 mA	9 W	11 W	80	4000K	60°

13W 1200 lm – 1300 lm



ILDSQ100-13W-830  
ILDSQ100-13W-840

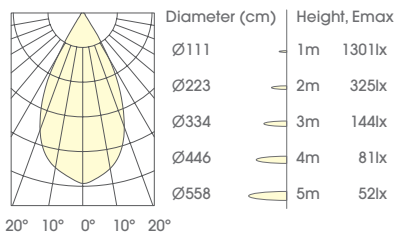

Specification Details

ILDSQ100-13W 1200-1300 Lm (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ILDSQ100-13W-830	1600 lm	1200 lm	36 V	350 mA	13 W	15 W	80	3000K	60°
ILDSQ100-13W-840	1700 lm	1300 lm	36 V	350 mA	13 W	15 W	80	4000K	60°