

Order options

SYSTEM POWER

21W
28W

COLOUR TEMPERATURE

3000K
4000K

COLOUR RENDERING INDEX

CRI80
CRI90

ELECTRICAL

Non-Dim
Phase Dim
1-10V
DALI

LENS



70° Beam

REFLECTOR




Matt

White


Black

ILDSQ150

3000K
(Standard)



IP54 UGR <19




Light distribution for 3000K

18W 1700 lm – 1800 lm



ILDSQ150-18W-830
ILDSQ150-18W-840

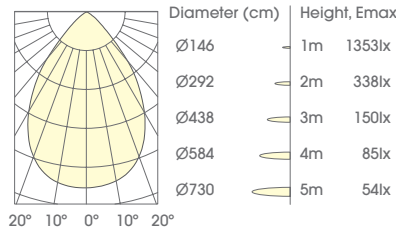

Specification Details


ILDSQ150-18W 1700-1800 Lm (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ILDSQ150-18W-830	2300 lm	1700 lm	36 V	500 mA	18 W	21 W	80	3000K	70°
ILDSQ150-18W-840	2400 lm	1800 lm	36 V	500 mA	18 W	21 W	80	4000K	70°

25W 2400 lm – 2600 lm



ILDSQ150-25W-830
ILDSQ150-25W-840

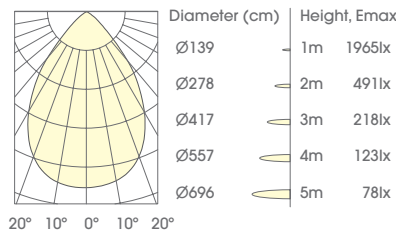

Specification Details

ILDSQ150-25W 2400-2600 Lm (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ILDSQ150-25W-830	3200 lm	2400 lm	36 V	700 mA	25 W	28 W	80	3000K	70°
ILDSQ150-25W-840	3400 lm	2600 lm	36 V	700 mA	25 W	28 W	80	4000K	70°