


SPECIFICATIONS OVERVIEW:

| | |
|--------------------|-------------------------------------|
| Version | Adjustable - Trim, Trimless |
| Trim Finish | White, Black |
| Reflector | Matt Silver, White, Black, Specular |
| Colour Temperature | 3000K, 4000K (others on request) |
| Beam Angle | 20°, 35°, 50° |
| LED Power | 25W, 38W |
| LED | CRI >90, L80 B10/50,000hr, <3SDCM |
| Controls | Non-Dim, Phase Dim, 1-10V, DALI |
| COI | Compliant (4000K only) |
| IP Rating | IP20 |
| Warranty | 5 Years |

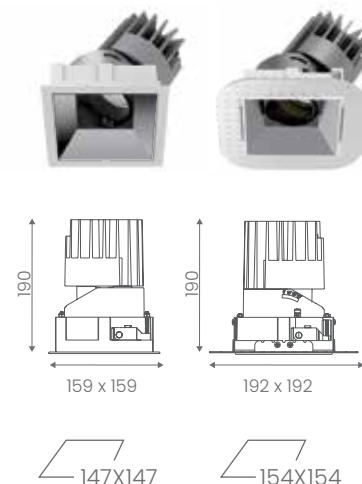

SPECIFICATIONS CODES:

ILDSQ-PRO150A-25W 1800-1900 lm nominal

| CODE | LED Output | Module Output | LED Voltage | LED Current | LED Power | CRI | CCT | BEAM |
|--------------------------|------------|---------------|-------------|-------------|-----------|-----|-------|------|
| ILDSQ-PRO150A-25W-930-20 | 2700lm | 1800lm | 36V | 700mA | 25W | 90 | 3000K | 20° |
| ILDSQ-PRO150A-25W-940-20 | 2800lm | 1900lm | 36V | 700mA | 25W | 90 | 4000K | 20° |
| ILDSQ-PRO150A-25W-930-35 | 2700lm | 1800lm | 36V | 700mA | 25W | 90 | 3000K | 35° |
| ILDSQ-PRO150A-25W-940-35 | 2800lm | 1900lm | 36V | 700mA | 25W | 90 | 4000K | 35° |
| ILDSQ-PRO150A-25W-930-50 | 2700lm | 1800lm | 36V | 700mA | 25W | 90 | 3000K | 50° |
| ILDSQ-PRO150A-25W-940-50 | 2800lm | 1900lm | 36V | 700mA | 25W | 90 | 4000K | 50° |

ILDSQ-PRO150A-38W 2500-2700 lm nominal

| CODE | LED Output | Module Output | LED Voltage | LED Current | LED Power | CRI | CCT | BEAM |
|--------------------------|------------|---------------|-------------|-------------|-----------|-----|-------|------|
| ILDSQ-PRO150A-38W-930-20 | 3700lm | 2500lm | 36V | 1050mA | 38W | 90 | 3000K | 20° |
| ILDSQ-PRO150A-38W-940-20 | 3900lm | 2700lm | 36V | 1050mA | 38W | 90 | 4000K | 20° |
| ILDSQ-PRO150A-38W-930-35 | 3700lm | 2500lm | 36V | 1050mA | 38W | 90 | 3000K | 35° |
| ILDSQ-PRO150A-38W-940-35 | 3900lm | 2700lm | 36V | 1050mA | 38W | 90 | 4000K | 35° |
| ILDSQ-PRO150A-38W-930-50 | 3700lm | 2500lm | 36V | 1050mA | 38W | 90 | 3000K | 50° |
| ILDSQ-PRO150A-38W-940-50 | 3900lm | 2700lm | 36V | 1050mA | 38W | 90 | 4000K | 50° |