



ILLURE

LED PANELS

SPECIFICATIONS OVERVIEW:

Type	Cyanosis Panel
Trim Finish	White
Colour Temperature	3000K, 4000K, 6000K
Beam Angle	120°
LED Power	18W
Dimensions	295mm x 295mm
LED	CRI >90, L80 B10/50,000hr, <3SDCM
Controls	Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP40
UGR	22
Warranty	5 Years




SPECIFICATIONS CODES:

IL-COI-300x300 1440-1620 Lm nominal

Code	LED Output	LED Current	LED Power	CRI	CCT
IL-COI-3030-18W-930	1440 lm	450 mA	18 W	>90	3000K
IL-COI-3030-18W-940	1620 lm	450 mA	18 W	>90	4000K
IL-COI-3030-18W-960	1620 lm	450 mA	18 W	>90	6000K

DIAGRAMS:

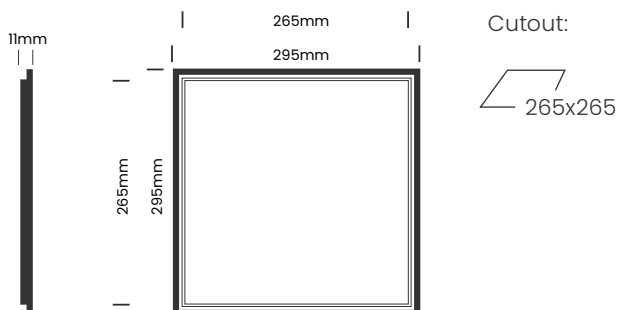

SPECIFICATIONS OVERVIEW:

Type	Cyanosis Panel
Trim Finish	White
Colour Temperature	3000K, 4000K, 6000K
Beam Angle	120°
LED Power	18W, 24W
Dimensions	295mm x 595mm
LED	CRI >90, L80 B10/50,000hr, <3SDCM
Controls	Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP40, IP65
UGR	22
Warranty	5 Years




SPECIFICATIONS CODES:

IL-COI-300x600 1440-2400 Lm nominal


Code	LED Output	LED Current	LED Power	CRI	CCT	IP
IL-COI-3060-18W-930	1440 lm	450 mA	18 W	>90	3000K	40
IL-COI-3060-18W-960	1620 lm	450 mA	18 W	>90	6000K	40
IL-COI-3060-24W-930	1920 lm	550 mA	24 W	>90	3000K	40
IL-COI-3060-24W-940	2160 lm	550 mA	24 W	>90	4000K	40
IL-COI-3060-24W-960	2160 lm	550 mA	24 W	>90	6000K	40
IL-COI-3060-24W-930-IP65	2160 lm	550 mA	24 W	>90	3000K	65
IL-COI-3060-24W-940-IP65	2400 lm	550 mA	24 W	>90	4000K	65
IL-COI-3060-24W-960-IP65	2400 lm	550 mA	24 W	>90	6000K	65

DIAGRAMS:

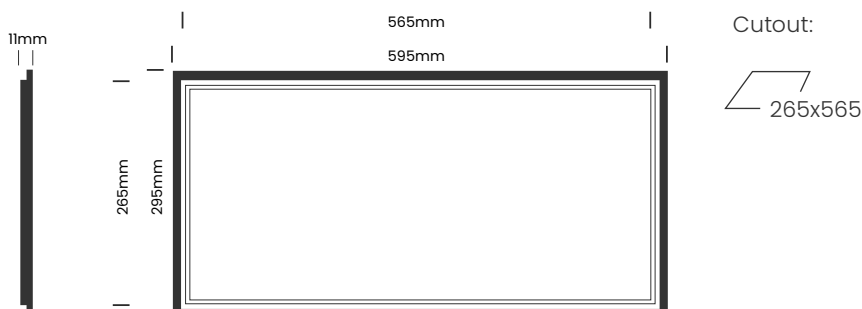

SPECIFICATIONS OVERVIEW:

Type	Cyanosis Panel
Trim Finish	White
Colour Temperature	3000K, 4000K, 6000K
Beam Angle	120°
LED Power	26W, 36W, 40W
Dimensions	295mm x 1195mm
LED	CRI >90, L80 B10/50,000hr, <3SDCM
Controls	Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP40, IP65
UGR	22
Warranty	5 Years

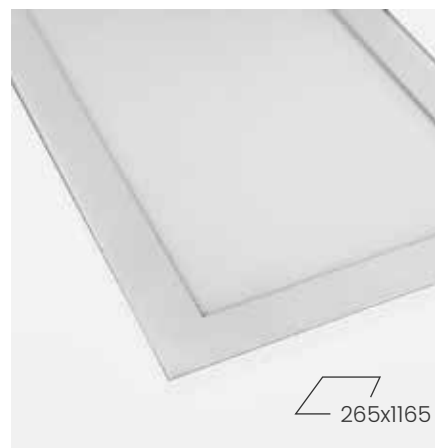


SPECIFICATIONS CODES:

IL-COI-300x1200 2340-4000 Lm nominal


Code	LED Output	LED Current	LED Power	CRI	CCT	BEAM	IP
IL-COI-30120-26W-930	2340 lm	600 mA	26 W	>90	3000K	120°	40
IL-COI-30120-26W-960	2600 lm	600 mA	26 W	>90	6000K	120°	40
IL-COI-30120-36W-930	3420 lm	1000 mA	36 W	>90	3000K	120°	40
IL-COI-30120-36W-940	3600 lm	1000 mA	36 W	>90	4000K	120°	40
IL-COI-30120-36W-960	3600 lm	1000 mA	36 W	>90	6000K	120°	40
IL-COI-30120-40W-930	3600 lm	1000 mA	40 W	>90	3000K	120°	40
IL-COI-30120-40W-940	4000 lm	1000 mA	40 W	>90	4000K	120°	40
IL-COI-30120-40W-960	4000 lm	1000 mA	40 W	>90	6000K	120°	40
IL-COI-30120-40W-930-IP65	3600 lm	1000 mA	40 W	>90	3000K	120°	65
IL-COI-30120-40W-940-IP65	4000 lm	1000 mA	40 W	>90	4000K	120°	65
IL-COI-30120-40W-960-IP65	4000 lm	1000 mA	40 W	>90	6000K	120°	65

DIAGRAMS:

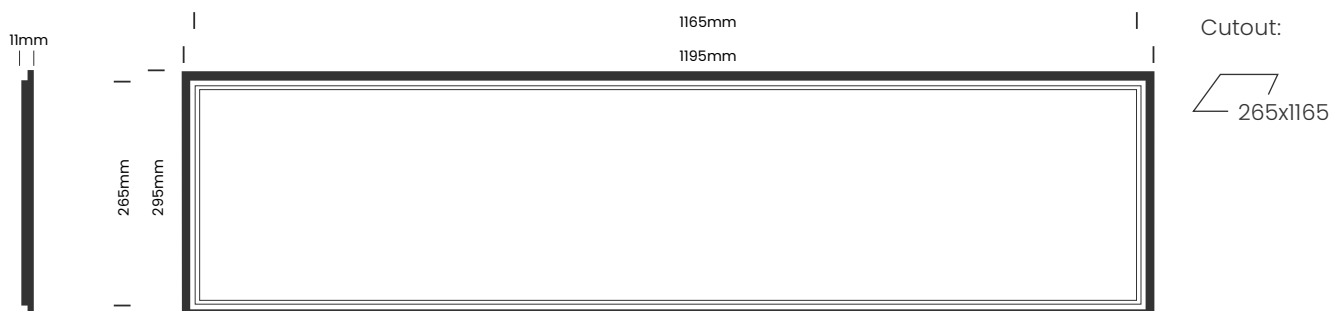

SPECIFICATIONS OVERVIEW:

Type	Cyanosis Panel
Trim Finish	White
Colour Temperature	3000K, 4000K, 6000K
Beam Angle	120°
LED Power	40W
Dimensions	595mm x 595mm
LED	CRI >90, L80 B10/50,000hr, <3SDCM
Controls	Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP40, IP65
UGR	22
Warranty	5 Years

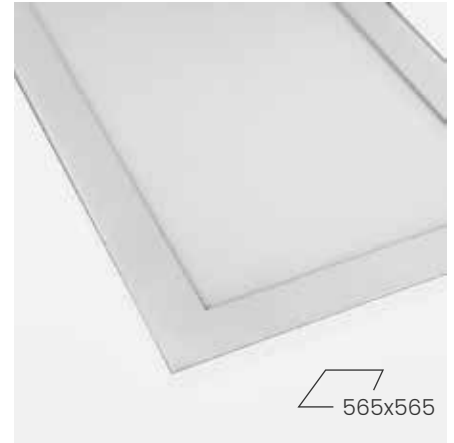


SPECIFICATIONS CODES:

IL-COI-600x600 3600-4000 Lm nominal


Code	LED Output	LED Current	LED Power	CRI	CCT	BEAM	IP
IL-COI-6060-40W-930	3600 lm	1000 mA	40 W	>90	3000K	120°	40
IL-COI-6060-40W-940	4000 lm	1000 mA	40 W	>90	4000K	120°	40
IL-COI-6060-40W-960	4000 lm	1000 mA	40 W	>90	6000K	120°	40
IL-COI-6060-40W-930-IP65	3600 lm	1000 mA	40 W	>90	3000K	120°	65
IL-COI-6060-40W-940-IP65	4000 lm	1000 mA	40 W	>90	4000K	120°	65
IL-COI-6060-40W-960-IP65	4000 lm	1000 mA	40 W	>90	6000K	120°	65

DIAGRAMS:

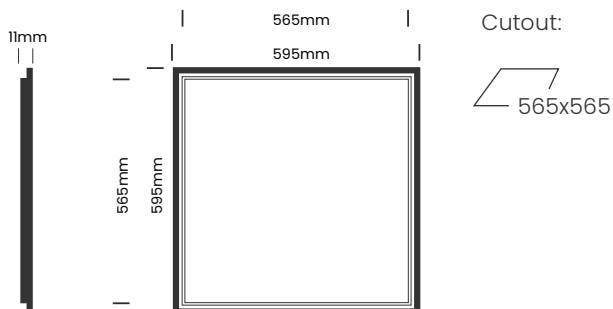

SPECIFICATIONS OVERVIEW:

Type	Cyanosis Panel
Trim Finish	White
Colour Temperature	3000K, 4000K, 6000K
Beam Angle	120°
LED Power	60W
Dimensions	595mm x 1195mm
LED	CRI >90, L80 B10/50,000hr, <3SDCM
Controls	Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP40
UGR	22
Warranty	5 Years

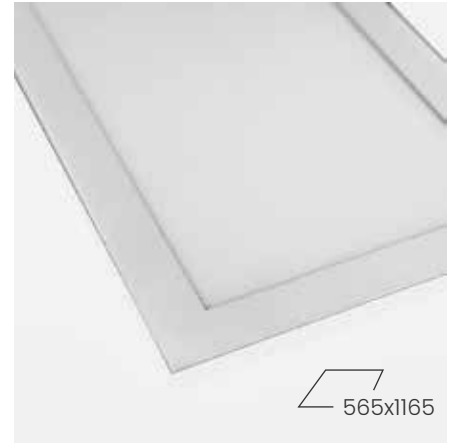


SPECIFICATIONS CODES:

IL-COI-600x1200 5400-6000 Lm nominal


Code	LED Output	LED Current	LED Power	CRI	CCT	BEAM
IL-COI-60120-60W-930	5400 lm	1500 mA	60 W	>90	3000K	120°
IL-COI-60120-60W-940	6000 lm	1500 mA	60 W	>90	4000K	120°
IL-COI-60120-60W-960	6000 lm	1500 mA	60 W	>90	6000K	120°

DIAGRAMS:

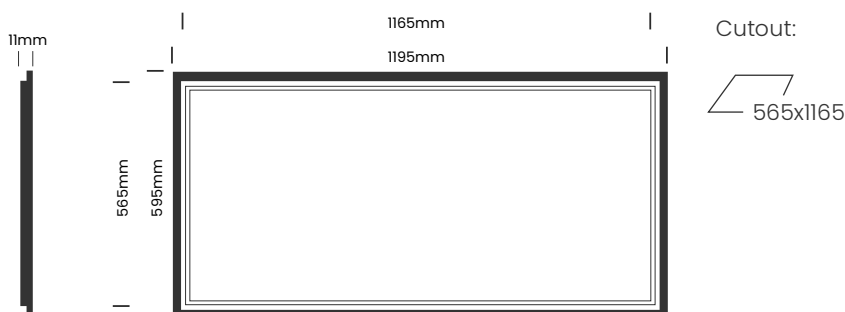

SPECIFICATIONS OVERVIEW:

Type	Low Glare Panel
Trim Finish	White
Colour Temperature	3000K, 4000K, 6000K
Beam Angle	110°
LED Power	18W, 19W
Dimensions	295mm x 295mm
LED	CRI >80, L80 B10/50,000hr, <3SDCM
Controls	Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP40
UGR	<19
Warranty	5 Years

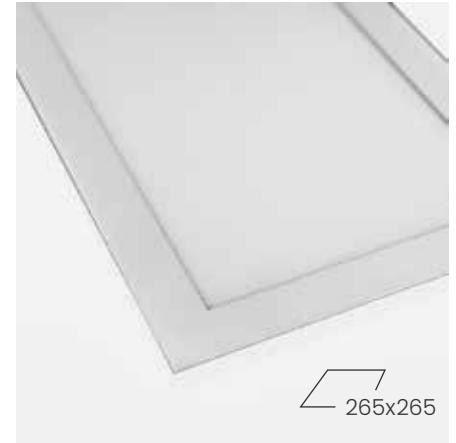


SPECIFICATIONS CODES:

IL-UGR-300x300 1440-1620 Lm nominal

Code	LED Output	LED Current	LED Power	CRI	CCT	BEAM
IL-UGR-3030-18W-930	1440 lm	450 mA	18 W	>90	3000K	110°
IL-UGR-3030-18W-940	1620 lm	450 mA	18 W	>90	4000K	110°
IL-UGR-3030-18W-960	1620 lm	450 mA	18 W	>90	6000K	110°
IL-UGR-3030-19W-930	1440 lm	450 mA	19 W	>90	3000K	110°
IL-UGR-3030-19W-940	1620 lm	450 mA	19 W	>90	4000K	110°
IL-UGR-3030-19W-960	1620 lm	450 mA	19 W	>90	6000K	110°

DIAGRAMS:

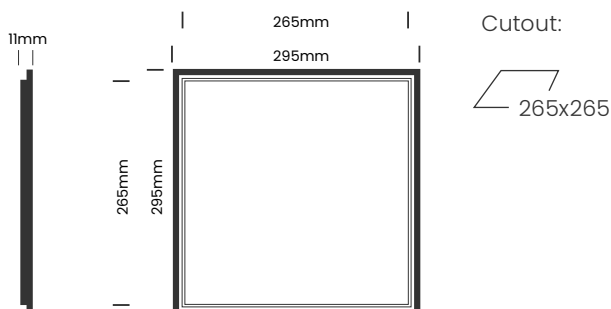

SPECIFICATIONS OVERVIEW:

Type	Low Glare Panel
Trim Finish	White
Colour Temperature	3000K, 4000K, 6000K
Beam Angle	110°
LED Power	18W, 19W, 40W
Dimensions	295mm x 595mm
LED	CRI >80, L80 B10/50,000hr, <3SDCM
Controls	Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP40
UGR	<19
Warranty	5 Years




SPECIFICATIONS CODES:


IL-UGR-300x600 1440-4000 Lm nominal

Code	LED Output	LED Current	LED Power	CRI	CCT	BEAM
IL-UGR-3060-18W-930	1440 lm	450 mA	18 W	>90	3000K	110°
IL-UGR-3060-18W-940	1620 lm	450 mA	18 W	>90	4000K	110°
IL-UGR-3060-18W-960	1620 lm	450 mA	18 W	>90	6000K	110°
IL-UGR-3060-19W-930	1440 lm	450 mA	19 W	>90	3000K	110°
IL-UGR-3060-19W-940	1620 lm	450 mA	19 W	>90	4000K	110°
IL-UGR-3060-19W-960	1620 lm	450 mA	19 W	>90	6000K	110°
IL-UGR-3060-40W-930	3600 lm	1000 mA	40 W	>90	3000K	110°
IL-UGR-3060-40W-940	4000 lm	1000 mA	40 W	>90	4000K	110°
IL-UGR-3060-40W-960	4000 lm	1000 mA	40 W	>90	6000K	110°

DIAGRAMS:

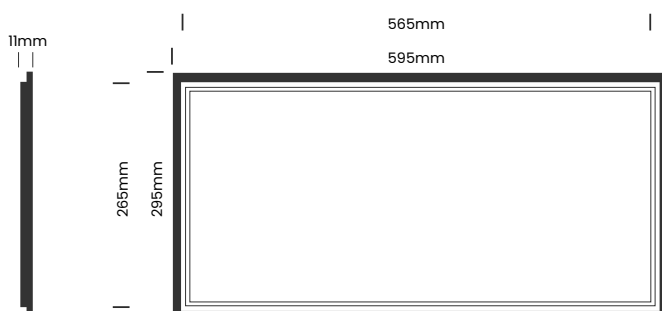

Cutout:



SPECIFICATIONS OVERVIEW:

Type	Low Glare Panel
Trim Finish	White
Colour Temperature	3000K, 4000K, 6000K
Beam Angle	110°
LED Power	26W, 36W, 60W
Dimensions	295mm x 1195mm
LED	CRI >80, L80 B10/50,000hr, <3SDCM
Controls	Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP40
UGR	<19
Warranty	5 Years




SPECIFICATIONS CODES:

IL-UGR-300x1200 2340-6000 Lm nominal

Code	LED Output	LED Current	LED Power	CRI	CCT	BEAM
IL-UGR-30120-26W-930	2340 lm	600 mA	26 W	>90	3000K	110°
IL-UGR-30120-26W-940	2600 lm	600 mA	26 W	>90	4000K	110°
IL-UGR-30120-26W-960	2600 lm	600 mA	26 W	>90	6000K	110°
IL-UGR-30120-36W-930	3240 lm	900 mA	36 W	>90	3000K	110°
IL-UGR-30120-36W-940	3600 lm	900 mA	36 W	>90	4000K	110°
IL-UGR-30120-36W-960	3600 lm	900 mA	36 W	>90	6000K	110°
IL-UGR-30120-60W-930	5400 lm	1500 mA	60 W	>90	3000K	110°
IL-UGR-30120-60W-940	6000 lm	1500 mA	60 W	>90	4000K	110°
IL-UGR-30120-60W-960	6000 lm	1500 mA	60 W	>90	6000K	110°

DIAGRAMS:

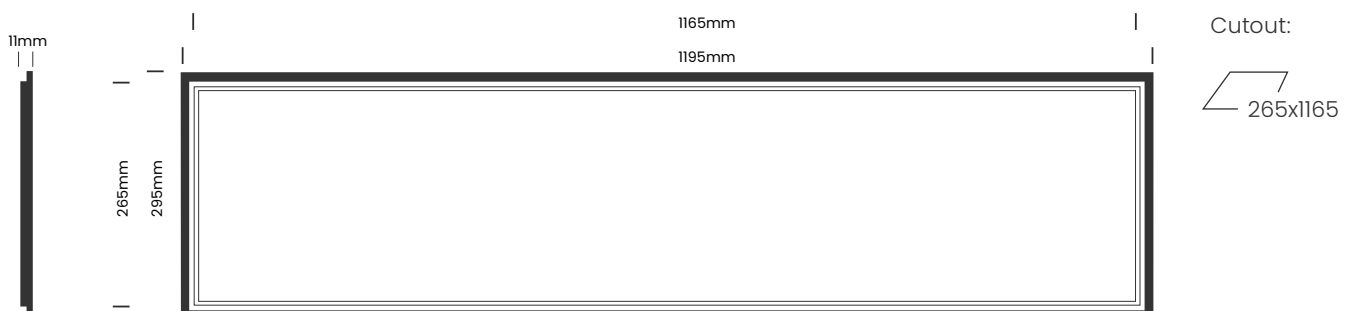

SPECIFICATIONS OVERVIEW:

Type	Low Glare Panel
Trim Finish	White
Colour Temperature	3000K, 4000K, 6000K
Beam Angle	110°
LED Power	26W, 36W, 60W
Dimensions	595mm x 595mm
LED	CRI >80, L80 B10/50,000hr, <3SDCM
Controls	Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP40
UGR	<19
Warranty	5 Years




SPECIFICATIONS CODES:

IL-UGR-600x600 2340-6000 Lm nominal

Code	LED Output	LED Current	LED Power	CRI	CCT	BEAM
IL-UGR-6060-26W-930	2340 lm	600 mA	26 W	>90	3000K	110°
IL-UGR-6060-26W-940	2600 lm	600 mA	26 W	>90	4000K	110°
IL-UGR-6060-26W-960	2600 lm	600 mA	26 W	>90	6000K	110°
IL-UGR-6060-36W-930	3240 lm	900 mA	36 W	>90	3000K	110°
IL-UGR-6060-36W-940	3600 lm	900 mA	36 W	>90	4000K	110°
IL-UGR-6060-36W-960	3600 lm	900 mA	36 W	>90	6000K	110°
IL-UGR-6060-60W-930	5400 lm	1500 mA	60 W	>90	3000K	110°
IL-UGR-6060-60W-940	6000 lm	1500 mA	60 W	>90	4000K	110°
IL-UGR-6060-60W-960	6000 lm	1500 mA	60 W	>90	6000K	110°

DIAGRAMS:

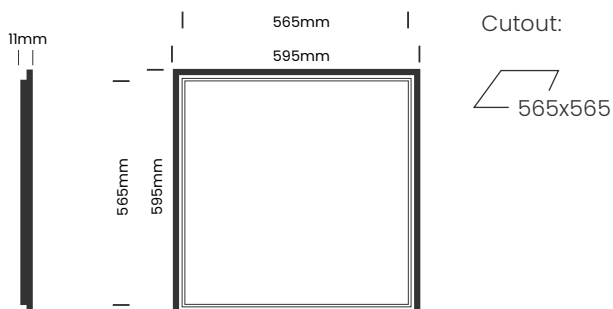

SPECIFICATIONS OVERVIEW:

Type	Low Glare Panel
Trim Finish	White
Colour Temperature	3000K, 4000K, 6000K
Beam Angle	110°
LED Power	38W, 100W
Dimensions	595mm x 1195mm
LED	CRI >80, L80 B10/50,000hr, <3SDCM
Controls	Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP40
UGR	<19
Warranty	5 Years





SPECIFICATIONS CODES:

IL-UGR-600x600 2340-6000 Lm nominal

Code	LED Output	LED Current	LED Power	CRI	CCT	BEAM
IL-UGR-60120-26W-930	4900 lm	950 mA	38 W	>90	3000K	110°
IL-UGR-60120-26W-940	5500 lm	950 mA	38 W	>90	4000K	110°
IL-UGR-60120-26W-960	5500 lm	950 mA	38 W	>90	6000K	110°
IL-UGR-60120-36W-930	9000 lm	1200 mA*	100 W	>90	3000K	110°
IL-UGR-60120-36W-940	10000 lm	1200 mA*	100 W	>90	4000K	110°
IL-UGR-60120-36W-960	10000 lm	1200 mA*	100 W	>90	6000K	110°

* 2 Drivers Required

DIAGRAMS:

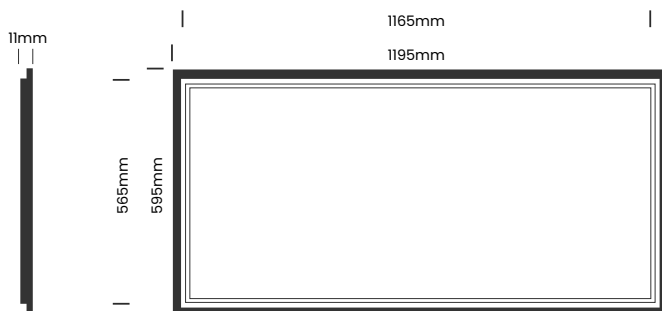

ILLURE