



ILLURE

PROFILES



SPECIFICATIONS OVERVIEW:

Mounting	Surface Mounted
Finish	Anodised, White, Black
Diffuser	Clear, Opal, Flexible Opal, Flexible Black
Colour Temperature	2700k, 3000k, 4000k
LED Strip	10W / 1100lm
Beam Angle	120°
CRI	>90
Controls	24VDC Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP20, IP67
SCDM	3
Operating Temperature	-20°-45°
Warranty	5 Years




SPECIFICATIONS CODES:

Item #	Product Code	Description
40360	ILP178	17mm x 8mm surface mounted profile supplied in 2m lengths
40360-W	ILP178-W	17mm x 8mm surface mounted profile supplied in 2m lengths (pre painted White)
40360-B	ILP178-B	17mm x 8mm surface mounted profile supplied in 2m lengths (pre painted black)
40100	ILD17-C	Clear diffuser
40101	ILD17-O	Opal diffuser
40102	ILD1730-C	30 degree lens
40103	ILDF17-O	Flexible opal diffuser
40104	ILDF17-B	Flexible black diffuser
40361	ILP178-EC	End cap
40362	ILP178-ECH	End cap with hole
40363	ILP178-REC	Round end cap
40364	ILP178-RECH	Round end cap with hole
40070	ILP1715-MC	Mounting clip
40071	ILP178-AMC	Adjustable mounting clip

SPECIFICATIONS OVERVIEW:

Mounting	Recessed
Finish	Anodised, White, Black
Diffuser	Clear, Opal, Flexible Opal, Flexible Black
Colour Temperature	2700k, 3000k, 4000k
LED Strip	10W / 1100lm
Beam Angle	120°
CRI	>90
Controls	24VDC Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP20, IP67
SDCM	3
Operating Temperature	-20°-45°
Warranty	5 Years




SPECIFICATIONS CODES:

Item #	Product Code	Description
40370	ILPF178	17mm x 8mm recessed profile supplied in 2m lengths
40370-W	ILPF178-W	17mm x 8mm recessed profile supplied in 2m lengths (pre painted White)
40370-B	ILPF178-B	17mm x 8mm recessed profile supplied in 2m lengths (pre painted black)
40100	ILD17-C	Clear diffuser
40101	ILD17-O	Opal diffuser
40103	ILDF17-O	Flexible opal diffuser
40104	ILDF17-B	Flexible black diffuser
40371	ILPF178-EC	End cap
40372	ILPF178-ECH	End cap with hole

SPECIFICATIONS OVERVIEW:

Mounting	Surface Mounted
Finish	Anodised, White, Black
Diffuser	Clear, Opal, Flexible Opal, Flexible Black
Colour Temperature	2700k, 3000k, 4000k
LED Strip	10W / 1100lm, 15W / 1800lm, 20W / 2100lm
Beam Angle	120°
CRI	>90
Controls	Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP20, IP67
SCDM	3
Operating Temperature	-20°-45°
Warranty	5 Years




SPECIFICATIONS CODES:

Item #	Product Code	Description
40380	ILP1715	17mm x 15mm surface mounted profile supplied in 2m lengths
40380-W	ILP1715-W	17mm x 15mm surface mounted profile supplied in 2m lengths (pre painted White)
40380-B	ILP1715-B	17mm x 15mm surface mounted profile supplied in 2m lengths (pre painted black)
40100	ILD17-C	Clear diffuser
40101	ILD17-O	Opal diffuser
40103	ILDF17-O	Flexible opal diffuser
40104	ILDF17-B	Flexible black diffuser
40381	ILP1715-EC	End cap
40382	ILP1715-ECH	End cap with hole
40070	ILP1715-MC	Mounting clip
40071	ILP178-AMC	Adjustable mounting clip

SPECIFICATIONS OVERVIEW:

Mounting	Recessed
Finish	Anodised, White, Black
Diffuser	Clear, Opal, Flexible Opal, Flexible Black
Colour Temperature	2700k, 3000k, 4000k
LED Strip	10W / 1100lm, 15W / 1800lm, 20W / 2100lm
Beam Angle	120°
CRI	>90
Controls	24VDC Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP20, IP67
SCDM	3
Operating Temperature	-20°-45°
Warranty	5 Years




SPECIFICATIONS CODES:

Item #	Product Code	Description
40390	ILPF1715	17mm x 15mm recessed profile supplied in 2m lengths
40390-W	ILPF1715-W	17mm x 15mm recessed profile supplied in 2m lengths (pre painted White)
40390-B	ILPF1715-B	17mm x 15mm recessed profile supplied in 2m lengths (pre painted black)
40100	ILD17-C	Clear diffuser
40101	ILD17-O	Opal diffuser
40103	ILDF17-O	Flexible opal diffuser
40104	ILDF17-B	Flexible black diffuser
40391	ILPF1715-EC	End cap
40392	ILPF1715-ECH	End cap with hole

SPECIFICATIONS OVERVIEW:

Mounting	Surface Mounted
Finish	Anodised, White, Black
Diffuser	Clear, Opal, Flexible Opal, Flexible Black
Colour Temperature	2700k, 3000k, 4000k
LED Strip	10W / 1100lm
Beam Angle	120°
CRI	>90
Controls	24VDC Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP20, IP67
SCDM	3
Operating Temperature	-20°-45°
Warranty	5 Years





SPECIFICATIONS CODES:

Item #	Product Code	Description
40400	ILPA1919	19mm x 19mm surface mounted angle profile supplied in 2m lengths
40400-W	ILPA1919-W	19mm x 19mm surface mounted angle profile supplied in 2m lengths (pre painted White)
40400-B	ILPA1919-B	19mm x 19mm surface mounted angle profile supplied in 2m lengths (pre painted black)
40100	ILD17-C	Clear diffuser
40101	ILD17-O	Opal diffuser
40103	ILDF17-O	Flexible opal diffuser
40104	ILDF17-B	Flexible black diffuser
40401	ILPA1919-EC	End cap
40402	ILPA1919-ECH	End cap with hole
40403	ILPA1919-MC	Mounting clip

SPECIFICATIONS OVERVIEW:

Mounting	Surface Mounted
Finish	Anodised, White, Black
Diffuser	Opal
Colour Temperature	2700k, 3000k, 4000k
LED Strip	10W / 1100lm, 15W / 1800lm, 20W / 2100lm
Beam Angle	120°
CRI	>90
Controls	24VDC Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP20, IP67
SCDM	3
Operating Temperature	-20°-45°
Warranty	5 Years




SPECIFICATIONS CODES:

Item #	Product Code	Description
40430	ILP2011	20mm x 11mm surface mounted profile supplied in 2m lengths
40431	ILDR20-O	Round opal diffuser
40432	ILDD20-D	Drop opal diffuser
40433	ILP2011-ECR	Round end cap
40434	ILP2011-ECRH	Round end cap with hole
40435	ILP2011-EC	Square end cap

SPECIFICATIONS OVERVIEW:

Mounting	Recessed
Finish	Anodised, White, Black
Diffuser	Opal
Colour Temperature	2700k, 3000k, 4000k
LED Strip	10W / 1100lm
Beam Angle	120°
CRI	>90
Controls	24VDC Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP20, IP67
SCDM	3
Operating Temperature	-20°-45°
Warranty	5 Years




SPECIFICATIONS CODES:

Item #	Product Code	Description
40440	ILPF2137	21mm x 37mm recessed profile supplied in 2m lengths
40170	ILD21-O	Opal diffuser
40441	ILPF2137-EC	End cap and screws
40442	ILPF2137-ECH	End cap with cable hole and screws
40443	ILPF2137-SC	Spring clip
40040	ILS3	Inline support
40041	ILS3-H	Horizontal support
40042	ILS3-V	Vertical support

SPECIFICATIONS OVERVIEW:

Mounting	Recessed Trimless
Finish	Anodised, White, Black
Diffuser	Opal
Colour Temperature	2700k, 3000k, 4000k
LED Strip	10W / 1100lm, 15W / 1800lm, 20W / 2100lm
Beam Angle	120°
CRI	>90
Controls	24VDC Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP20, IP67
SCDM	3
Operating Temperature	-20°-45°
Warranty	5 Years




SPECIFICATIONS CODES:

Item #	Product Code	Description
40690	ILPT2137	21mm x 37mm trimless profile supplied in 3m lengths
40170	ILD21-O	Opal diffuser
40691	ILPT2137-EC	End cap and screws
40692	ILPT2137-ECH	End cap with cable hole and screws
40040	ILS3	Inline support
40041	ILS3-H	Horizontal support
40042	ILS3-V	Vertical support

SPECIFICATIONS OVERVIEW:

Mounting	Recessed
Finish	Anodised, White, Black
Diffuser	Opal
Colour Temperature	2700k, 3000k, 4000k
LED Strip	10W / 1100lm
Beam Angle	120°
CRI	>90
Controls	24VDC Non-Dim, Phase Dim, 1-10V, DALI
IP Rating	IP20, IP67
SCDM	3
Operating Temperature	-20°-45°
Warranty	5 Years

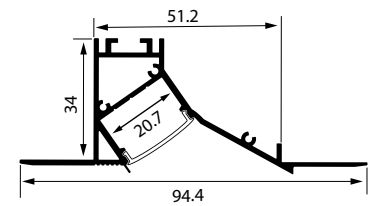

SPECIFICATIONS CODES:

Item #	Product Code	Description
40740	ILPTW5136	51mm x 36mm wall profile supplied in 3m lengths
40741	ILD22-O	Opal diffuser
40742	ILPTW5136-EC	End cap and screws
40743	ILPTW5136-ECH	End cap with cable hole and screws
40050	ILS4	Inline support
40051	ILS4-V	Vertical support
40052	ILS4-H	Horizontal support

ILLURE