











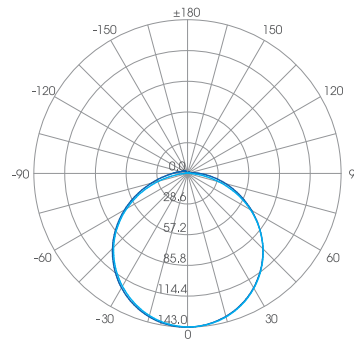


-  Silicone
-  IP68
-  Vertical Bend
-  120° Beam
-  150mm Min Bend
-  3SDCM
-  Operating Temp
-40°C to 55°C
-  0.15kg/m
-  DALI, 0-10V,
DMX, Triac
-  >80+
(>90 also available upon request)
-  5 Years
Warranty



ILFX10-24V-10W-120-V: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX10-24-10W-120-V-822	2200K	480 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-827	2700K	480 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-830	3000K	500 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-835	3500K	500 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-840	4000K	500 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-845	4500K	510 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-850	5000K	510 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-865	6500K	510 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-Blue	Blue	90 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-Green	Green	550 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-Red	Red	200 lm/m	24 v	10 w	120	100mm	5m	120°