



Silicone



IP68



Horizontal Bend



120° Beam



150mm Min Bend



3SDCM



Operating Temp  
-40°C to 55°C



0.15kg/m





DALI, 0-10V,  
DMX, Triac



>80+  
(>90 also available upon request)



5 Years  
Warranty

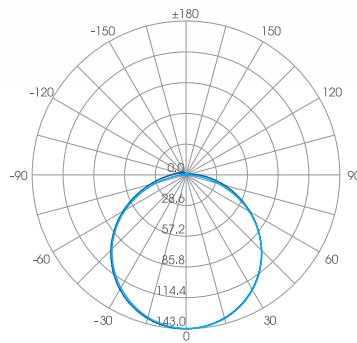

### ILFX20-24V-10W-120-H: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX20-24-10W-120-H-822	2200K	450 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-827	2700K	450 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-830	3000K	460 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-835	3500K	460 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-840	4000K	480 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-845	4500K	480 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-850	5000K	500 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-865	6500K	500 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-Blue	Blue	80 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-Green	Green	530 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-Red	Red	190 lm/m	24 v	10 w	120	100mm	5m	120°