



Silicone



IP68



Vertical Bend



120° Beam



80mm
Min Bend



3SDCM



Operating Temp
-40°C to 55°C



0.3kg/m





DALI, 0-10V,
DMX, Triac



>80+
(>90 also available upon request)



5 Years
Warranty

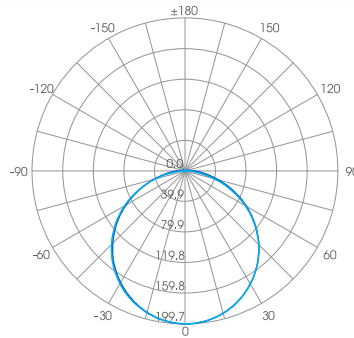

ILFX40-24V-10W-120-V: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX40-24-10W-120-V-822	2200K	470 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-827	2700K	508 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-830	3000K	500 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-835	3500K	500 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-840	4000K	500 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-845	4500K	510 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-850	5000K	515 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-865	6500K	515 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-Red	Red	95 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-Green	Green	515 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-Blue	Blue	155 lm/m	24 v	10 w	144	83.3mm	10m	120°