










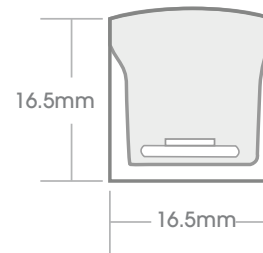
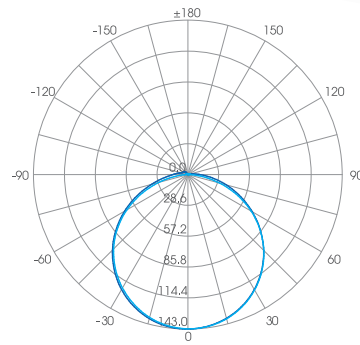


-  Silicone
-  IP68
-  Vertical Bend
-  120° Beam
-  120mm Min Bend
-  3SDCM
-  Operating Temp
-40°C to 55°C
-  0.43kg/m
-  DALI, 0-10V,
DMX, Triac
-  >80+
(>90 also available upon request)
-  5 Years
Warranty



ILFX60-24V-9W-120-V: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX60-24-9W-120-V-822	2200K	228 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-827	2700K	280 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-830	3000K	300 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-835	3500K	314 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-840	4000K	320 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-850	5000K	340 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-865	6500K	352 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-Amber	Amber	70 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-Blue	Blue	26 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-Green	Green	259 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-Orange	Orange	75 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-Pink	Pink	102 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-Red	Red	83 lm/m	24 v	9 w	120	100mm	10m	120°

ILFX60-24V-10W-120-V: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX60-24-10W-120-V-822	2200K	327 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-827	2700K	330 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-830	3000K	350 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-835	3500K	360 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-840	4000K	390 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-845	4500K	446 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-850	5000K	430 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-865	6500K	410 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-Amber	Amber	108 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-Blue	Blue	38 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-Green	Green	302 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-Orange	Orange	291 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-Pink	Pink	175 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-Red	Red	110 lm/m	24 v	10 w	144	83.3mm	10m	120°

ILFX60-24V-12W-120-V-TW: TUNABLE WHITE

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX60-TW-24-12W-120-V-822	2200K+5700K	263+294 lm/m	24 v	12 w	120	100mm	10m	120°
ILFX60-TW-24-12W-120-V-927	2700K+5700K	333+304 lm/m	24 v	12 w	120	100mm	10m	120°
ILFX60-TW-24-12W-120-V-830	3000K+5700K	272+278 lm/m	24 v	12 w	120	100mm	10m	120°

ILFX60-24V-13W-120-V-RGB: RGB

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX60-24-13W-120-V-RGB-Red	Red	40 lm/m	24 v	13 w	72	83.3mm	10m	120°
ILFX60-24-13W-120-V-RGB-Green	Green	104 lm/m	24 v	13 w	72	83.3mm	10m	120°
ILFX60-24-13W-120-V-RGB-Blue	Blue	19 lm/m	24 v	13 w	72	83.3mm	10m	120°

ILFX60-24V-17W-120-V-RGBW: RGBW

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX60-24-17W-120-V-RGBW-Red	Red	13 lm/m	24 v	17 w	72	83.3mm	8m	120°
ILFX60-24-17W-120-V-RGBW-Green	Green	150 lm/m	24 v	17 w	72	83.3mm	8m	120°
ILFX60-24-17W-120-V-RGBW-Blue	Blue	24 lm/m	24 v	17 w	72	83.3mm	8m	120°
ILFX60-24-17W-120-V-RGBW-927	2700K	163 lm/m	24 v	17 w	72	83.3mm	8m	120°
ILFX60-24-17W-120-V-RGBW-930	3000K	200 lm/m	24 v	17 w	72	83.3mm	8m	120°
ILFX60-24-17W-120-V-RGBW-940	4000K	215 lm/m	24 v	17 w	72	83.3mm	8m	120°
ILFX60-24-17W-120-V-RGBW-950	5000K	191 lm/m	24 v	17 w	72	83.3mm	8m	120°

ILFX60-24V-14W-120-V-RGB-DMX: DYNAMIC COLOUR CONTROL

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX60-24-14W-120-V-RGB-DMX-Red	Red	59 lm/m	24 v	14 w	70	100mm	8m	120°
ILFX60-24-14W-120-V-RGB-DMX-Green	Green	145 lm/m	24 v	14 w	70	100mm	8m	120°
ILFX60-24-14W-120-V-RGB-DMX-Blue	Blue	23 lm/m	24 v	14 w	70	100mm	8m	120°
ILFX60-24-14W-120-V-RGB-DMX-830	3000K	429 lm/m	24 v	14 w	70	100mm	8m	120°

ILFX60-24V-18W-120-V-RGBW-DMX: RGB DYNAMIC COLOUR CONTROL

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX60-24-18W-120-V-RGBW-DMX-Red	Red	60 lm/m	24 v	18 w	70	100mm	8m	120°
ILFX60-24-18W-120-V-RGBW-DMX-Green	Green	176 lm/m	24 v	18 w	70	100mm	8m	120°
ILFX60-24-18W-120-V-RGBW-DMX-Blue	Blue	34 lm/m	24 v	18 w	70	100mm	8m	120°
ILFX60-24-18W-120-V-RGBW-DMX-827	2700K	196 lm/m	24 v	18 w	70	100mm	8m	120°
ILFX60-24-18W-120-V-RGBW-DMX-830	3000K	193 lm/m	24 v	18 w	70	100mm	8m	120°
ILFX60-24-18W-120-V-RGBW-DMX-840	4000K	200 lm/m	24 v	18 w	70	100mm	8m	120°
ILFX60-24-18W-120-V-RGBW-DMX-850	5000K	210 lm/m	24 v	18 w	70	100mm	8m	120°