

ILLURE

FLEX 70

RANGE: H²O FLEX LED



Silicone



IP68



Horizontal Bend



120° Beam



150mm Min Bend



3SDCM



Operating Temp
-40°C to 55°C



0.43kg/m





DALI, 0-10V,
DMX, Triac



>80+
(>90 also available upon request)



5 Years
Warranty

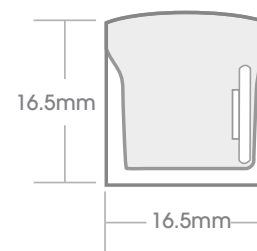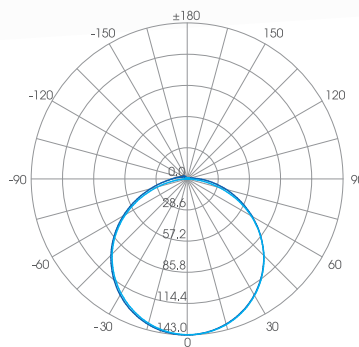

ILFX70-24V-10W-120-H: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX70-24-10W-120-H-822	2200K	350 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-827	2700K	400 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-830	3000K	389 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-835	3500K	394 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-840	4000K	411 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-845	4500K	500 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-850	5000K	407 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-865	6500K	399 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-Red	Red	51 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-Green	Green	290 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-Blue	Blue	122 lm/m	24 v	10 w	120	100mm	5m	120°