



Silicone



IP68



Vertical Bend



210° Beam



120mm
Min Bend



3SDCM



Operating Temp
-40°C to 55°C



0.43kg/m





DALI, 0-10V,
DMX, Triac



>80+
(>90 also available upon request)



5 Years
Warranty

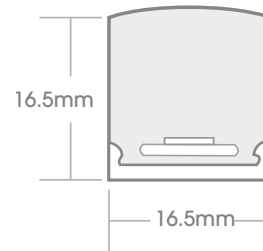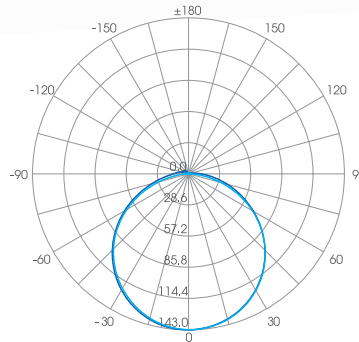

ILFX80-24V-9W-210-V: STATIC COLOUR

Code	CCT	LED output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	BEAM
ILFX80-24-9W-210-V-822	2200K	207 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-827	2700K	386 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-830	3000K	457 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-835	3500K	601 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-840	4000K	568 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-850	5000K	540 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-865	6500K	557 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-Amber	Amber	112 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-Blue	Blue	35 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-Green	Green	409 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-Orange	Orange	80 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-Pink	Pink	156 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-Red	Red	125 lm/m	24 v	9 w	120	100mm	10m	210°

ILFX80-24V-15W-210-V: STATIC COLOUR

Code	CCT	LED output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	BEAM
ILFX80-24-15W-210-V-822	2200K	930 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-827	2700K	950 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-830	3000K	977 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-835	3500K	985 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-840	4000K	990 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-850	5000K	1000 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-865	6500K	1050 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-Blue	Blue	90 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-Green	Green	500 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-Pink	Pink	300 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-Yellow	Yellow	420 lm/m	24 v	15 w	84	83.3mm	10m	210°

ILFX80-24V-12W-210-V-TW: TUNABLE WHITE

Code	CCT	LED output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX80-24-12W-210-V-TW-822	2200K+5700K	348+395 lm/m	24 v	12 w	120	100mm	10m	210°
ILFX80-24-12W-210-V-TW-827	2700K+5700K	334+400 lm/m	24 v	12 w	120	100mm	10m	210°
ILFX80-24-12W-210-V-TW-830	3000K+5700K	347+363 lm/m	24 v	12 w	120	100mm	10m	210°

ILFX80-24V-13W-210-V-RGB: RGB

Code	CCT	LED output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX80-24-13W-210-V-RGB-Red	Red	66 lm/m	24 v	13 w	72	83.3mm	10 m	210°
ILFX80-24-13W-210-V-RGB-Green	Green	178 lm/m	24 v	13 w	72	83.3mm	10 m	210°
ILFX80-24-13W-210-V-RGB-Blue	Blue	35 lm/m	24 v	13 w	72	83.3mm	10 m	210°

ILFX80-24V-17W-210-V-RGBW: RGBW

Code	CCT	LED output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX80-24-17W-210-V-RGBW-Red	Red	64 lm/m	24 v	17 w	72	83.3mm	8 m	210°
ILFX80-24-17W-210-V-RGBW-Green	Green	269 lm/m	24 v	17 w	72	83.3mm	8 m	210°
ILFX80-24-17W-210-V-RGBW-Blue	Blue	52 lm/m	24 v	17 w	72	83.3mm	8 m	210°
ILFX80-24-17W-210-RGB-V-RGBW-927	RGBW (2700K)	336 lm/m	24 v	17 w	72	83.3mm	8 m	210°
ILFX80-24-17W-210-RGB-V-RGBW-930	RGBW (3000K)	332 lm/m	24 v	17 w	72	83.3mm	8 m	210°
ILFX80-24-17W-210-RGB-V-RGBW-940	RGBW (4000K)	393 lm/m	24 v	17 w	72	83.3mm	8 m	210°
ILFX80-24-17W-210-RGB-V-RGBW-950	RGBW (5000K)	363 lm/m	24 v	17 w	72	83.3mm	8 m	210°