










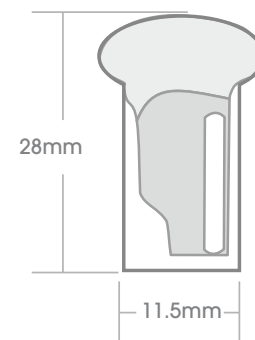
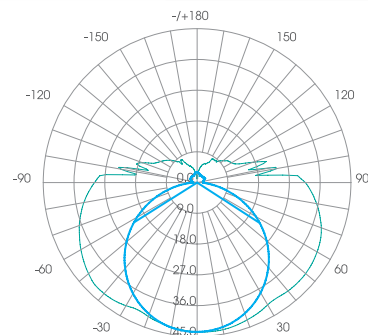


-  Silicone
-  IP68
-  Horizontal Bend
-  270° Beam
-  80mm Min Bend
-  3SDCM
-  Operating Temp
-40°C to 55°C
-  0.52kg/m
-  DALI, 0-10V,
DMX, Triac
-  >80+
(>90 also available upon request)
-  5 Years
Warranty



ILFX90-24V-5W-270-H: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX90-24-5W-270-H-822	2200K	141 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-827	2700K	143 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-830	3000K	145 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-835	3500K	150 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-840	4000K	157 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-845	4500K	178 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-850	5000K	150 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-865	6500K	140 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-Amber	Amber	48 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-Blue	Blue	18 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-Green	Green	122 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-Orange	Orange	32 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-Pink	Pink	48 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-Red	Red	42 lm/m	24 v	5 w	72	166.7mm	15m	270°

ILFX90-24V-12W-270-H: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX90-24-12W-270-H-822	2200K	250 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-827	2700K	250 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-830	3000K	250 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-835	3500K	300 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-840	4000K	376 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-845	4500K	268 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-850	5000K	360 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-865	6500K	320 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-Blue	Blue	30 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-Green	Green	303 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-Yellow	Yellow	151 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-Pink	Pink	112 lm/m	24 v	12 w	60	100mm	10m	270°

ILFX90-24V-12W-270-H-TW: TUNABLE WHITE

Code	CCT	LED output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX90-24-12W-270-H-TW-822	2200K+5700K	199+223 lm/m	24 v	12 w	120	100mm	10m	270°
ILFX90-24-12W-270-H-TW-827	2700K+5700K	232+225 lm/m	24 v	12 w	120	100mm	10m	270°
ILFX90-24-12W-270-H-TW-830	3000K+5700K	224+237 lm/m	24 v	12 w	120	100mm	10m	270°

ILFX90-24V-17W-270-H-RGBW: RGBW

Code	CCT	LED output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX90-24-17W-270-H-RGBW-Red	Red	25 lm/m	24 v	17 w	72	83.3mm	8 m	270°
ILFX90-24-17W-270-H-RGBW-Green	Green	100 lm/m	24 v	17 w	72	83.3mm	8 m	270°
ILFX90-24-17W-270-H-RGBW-Blue	Blue	18 lm/m	24 v	17 w	72	83.3mm	8 m	270°
ILFX90-24-17W-270-V-RGBW-827	RGBW (2700K)	129 lm/m	24 v	17 w	72	83.3mm	8 m	270°
ILFX90-24-17W-270-V-RGBW-830	RGBW (3000K)	134 lm/m	24 v	17 w	72	83.3mm	8 m	270°
ILFX90-24-17W-270-V-RGBW-840	RGBW (4000K)	171 lm/m	24 v	17 w	72	83.3mm	8 m	270°
ILFX90-24-17W-270-V-RGBW-850	RGBW (5000K)	158 lm/m	24 v	17 w	72	83.3mm	8 m	270°

ILFX90-24V-18W-270-H-RGBW-DMX: RGBW DYNAMIC COLOUR CONTROL

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX90-24-18W-270-H-RGBW-DMX-Red	Red	28 lm/m	24 v	18 w	70	100mm	8m	270°
ILFX90-24-18W-270-H-RGBW-DMX-Green	Green	94 lm/m	24 v	18 w	70	100mm	8m	270°
ILFX90-24-18W-270-H-RGBW-DMX-Blue	Blue	17 lm/m	24 v	18 w	70	100mm	8m	270°
ILFX90-24-18W-270-H-RGBW-DMX-827	2700K	122 lm/m	24 v	18 w	70	100mm	8m	270°
ILFX90-24-18W-270-H-RGBW-DMX-830	3000K	130 lm/m	24 v	18 w	70	100mm	8m	270°
ILFX90-24-18W-270-H-RGBW-DMX-840	4000K	151 lm/m	24 v	18 w	70	100mm	8m	270°
ILFX90-24-18W-270-H-RGBW-DMX-850	5000K	139 lm/m	24 v	18 w	70	100mm	8m	270°