

A close-up photograph of several interlocking white LED strips. The strips are arranged in a circular pattern, overlapping each other. Each strip has a gold-colored pin or connector visible on its surface. The background is dark, making the white strips stand out.

ILLURE

H20 FLEX LED



Silicone



IP68



Vertical Bend



120° Beam



150mm
Min Bend



3SDCM



Operating Temp
-40°C to 55°C



0.15kg/m





DALI, 0-10V,
DMX, Triac



>80+
(>90 also available upon request)



5 Years
Warranty

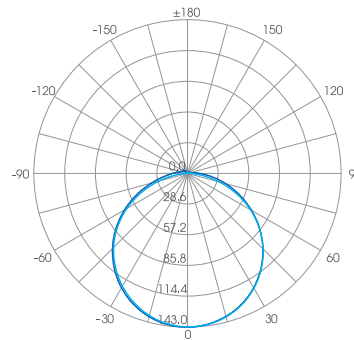

ILFX10-24V-10W-120-V: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX10-24-10W-120-V-822	2200K	480 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-827	2700K	480 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-830	3000K	500 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-835	3500K	500 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-840	4000K	500 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-845	4500K	510 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-850	5000K	510 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-865	6500K	510 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-Blue	Blue	90 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-Green	Green	550 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX10-24-10W-120-V-Red	Red	200 lm/m	24 v	10 w	120	100mm	5m	120°



Silicone



IP68



Horizontal Bend



120° Beam



150mm Min Bend



3SDCM



Operating Temp
-40°C to 55°C



0.15kg/m





DALI, 0-10V,
DMX, Triac



>80+
(>90 also available upon request)



5 Years
Warranty

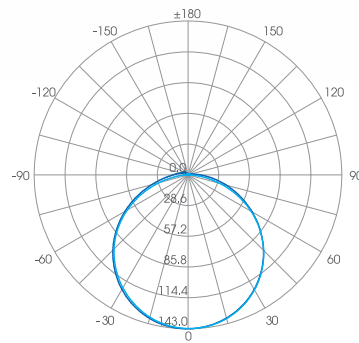

ILFX20-24V-10W-120-H: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX20-24-10W-120-H-822	2200K	450 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-827	2700K	450 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-830	3000K	460 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-835	3500K	460 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-840	4000K	480 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-845	4500K	480 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-850	5000K	500 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-865	6500K	500 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-Blue	Blue	80 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-Green	Green	530 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX20-24-10W-120-H-Red	Red	190 lm/m	24 v	10 w	120	100mm	5m	120°



Silicone



IP68



Horizontal Bend



120° Beam



80mm Min Bend



3SDCM



Operating Temp
-40°C to 55°C



0.165kg/m





DALI, 0-10V,
DMX, Triac



>80+
(>90 also available upon request)



5 Years
Warranty

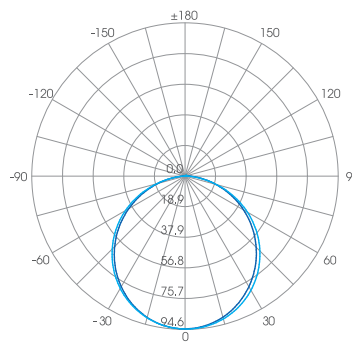

ILFX30-24V-5W-H: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX30-24-5W-120-H-822	2200K	130 lm/m	24 v	5 w	70	100mm	13m	120°
ILFX30-24-5W-120-H-827	2700K	130 lm/m	24 v	5 w	70	100mm	13m	120°
ILFX30-24-5W-120-H-830	3000K	150 lm/m	24 v	5 w	70	100mm	13m	120°
ILFX30-24-5W-120-H-835	3500K	150 lm/m	24 v	5 w	70	100mm	13m	120°
ILFX30-24-5W-120-H-840	4000K	160 lm/m	24 v	5 w	70	100mm	13m	120°
ILFX30-24-5W-120-H-845	4500K	160 lm/m	24 v	5 w	70	100mm	13m	120°
ILFX30-24-5W-120-H-850	5000K	180 lm/m	24 v	5 w	70	100mm	13m	120°
ILFX30-24-5W-120-H-865	6500K	180 lm/m	24 v	5 w	70	100mm	13m	120°
ILFX30-24-5W-120-H-Blue	Blue	30 lm/m	24 v	5 w	70	100mm	13m	120°
ILFX30-24-5W-120-H-Green	Green	160 lm/m	24 v	5 w	70	100mm	13m	120°
ILFX30-24-5W-120-H-Red	Red	35 lm/m	24 v	5 w	70	100mm	13m	120°

ILFX30-24V-10W-120-H: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX30-24-10W-120-H-822	2200K	220 lm/m	24 v	10 w	120	100mm	10m	120°
ILFX30-24-10W-120-H-827	2700K	220 lm/m	24 v	10 w	120	100mm	10m	120°
ILFX30-24-10W-120-H-830	3000K	240 lm/m	24 v	10 w	120	100mm	10m	120°
ILFX30-24-10W-120-H-835	3500K	240 lm/m	24 v	10 w	120	100mm	10m	120°
ILFX30-24-10W-120-H-840	4000K	260 lm/m	24 v	10 w	120	100mm	10m	120°
ILFX30-24-10W-120-H-845	4500K	260 lm/m	24 v	10 w	120	100mm	10m	120°
ILFX30-24-10W-120-H-850	5000K	260 lm/m	24 v	10 w	120	100mm	10m	120°
ILFX30-24-10W-120-H-865	6500K	260 lm/m	24 v	10 w	120	100mm	10m	120°
ILFX30-24-10W-120-H-Amber	Amber	65 lm/m	24 v	10 w	120	100mm	10m	120°
ILFX30-24-10W-120-H-Blue	Blue	40 lm/m	24 v	10 w	120	100mm	10m	120°
ILFX30-24-10W-120-H-Green	Green	210 lm/m	24 v	10 w	120	100mm	10m	120°
ILFX30-24-10W-120-H-Yellow	Yellow	90 lm/m	24 v	10 w	120	100mm	10m	120°
ILFX30-24-10W-120-H-Orange	Orange	60 lm/m	24 v	10 w	120	100mm	10m	120°
ILFX30-24-10W-120-H-Pink	Pink	60 lm/m	24 v	10 w	120	100mm	10m	120°
ILFX30-24-10W-120-H-Red	Red	65 lm/m	24 v	10 w	120	100mm	10m	120°



Silicone



IP68



Vertical Bend



120° Beam



80mm
Min Bend



3SDCM



Operating Temp
-40°C to 55°C



0.3kg/m





DALI, 0-10V,
DMX, Triac



>80+
(>90 also available upon request)



5 Years
Warranty

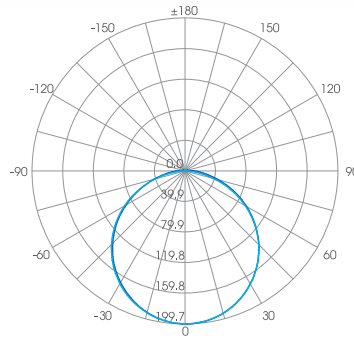

ILFX40-24V-10W-120-V: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX40-24-10W-120-V-822	2200K	470 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-827	2700K	508 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-830	3000K	500 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-835	3500K	500 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-840	4000K	500 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-845	4500K	510 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-850	5000K	515 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-865	6500K	515 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-Red	Red	95 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-Green	Green	515 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX40-24-10W-120-V-Blue	Blue	155 lm/m	24 v	10 w	144	83.3mm	10m	120°



Silicone



IP68



Horizontal Bend



120° Beam



80mm Min Bend



3SDCM



Operating Temp
-40°C to 55°C



0.4kg/m





DALI, 0-10V,
DMX, Triac



>80+
(>90 also available upon request)



5 Years
Warranty

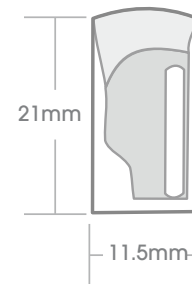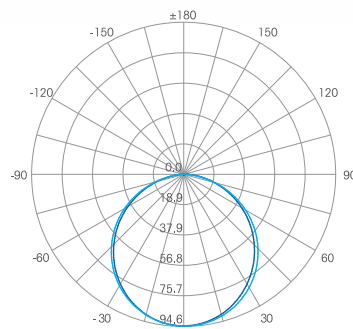

ILFX50-24V-5W-120-H: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX50-24-5W-120-H-822	2200K	109 lm/m	24 v	5 w	72	16.67mm	15m	120°
ILFX50-24-5W-120-H-827	2700K	115 lm/m	24 v	5 w	72	16.67mm	15m	120°
ILFX50-24-5W-120-H-830	3000K	120 lm/m	24 v	5 w	72	16.67mm	15m	120°
ILFX50-24-5W-120-H-835	3500K	125 lm/m	24 v	5 w	72	16.67mm	15m	120°
ILFX50-24-5W-120-H-840	4000K	116 lm/m	24 v	5 w	72	16.67mm	15m	120°
ILFX50-24-5W-120-H-845	4500K	117 lm/m	24 v	5 w	72	16.67mm	15m	120°
ILFX50-24-5W-120-H-850	5000K	125 lm/m	24 v	5 w	72	16.67mm	15m	120°
ILFX50-24-5W-120-H-865	6500K	120 lm/m	24 v	5 w	72	16.67mm	15m	120°
ILFX50-24-5W-120-H-Amber	Amber	37 lm/m	24 v	5 w	72	16.67mm	15m	120°
ILFX50-24-5W-120-H-Blue	Blue	111 lm/m	24 v	5 w	72	16.67mm	15m	120°
ILFX50-24-5W-120-H-Green	Green	108 lm/m	24 v	5 w	72	16.67mm	15m	120°
ILFX50-24-5W-120-H-Orange	Orange	30 lm/m	24 v	5 w	72	16.67mm	15m	120°
ILFX50-24-5W-120-H-Pink	Pink	50 lm/m	24 v	5 w	72	16.67mm	15m	120°
ILFX50-24-5W-120-H-Red	Red	37 lm/m	24 v	5 w	72	16.67mm	15m	120°

ILFX50-24V-13W-120-H: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX50-24-15W-120-H-822	2200K	690 lm/m	24 v	15 w	84	83.3mm	10m	120°
ILFX50-24-15W-120-H-827	2700K	700 lm/m	24 v	15 w	84	83.3mm	10m	120°
ILFX50-24-15W-120-H-830	3000K	844 lm/m	24 v	15 w	84	83.3mm	10m	120°
ILFX50-24-15W-120-H-835	3500K	730 lm/m	24 v	15 w	84	83.3mm	10m	120°
ILFX50-24-15W-120-H-840	4000K	735 lm/m	24 v	15 w	84	83.3mm	10m	120°
ILFX50-24-15W-120-H-845	4500K	740 lm/m	24 v	15 w	84	83.3mm	10m	120°
ILFX50-24-15W-120-H-850	5000K	745 lm/m	24 v	15 w	84	83.3mm	10m	120°
ILFX50-24-15W-120-H-865	6500K	750 lm/m	24 v	15 w	84	83.3mm	10m	120°
ILFX50-24-15W-120-H-Blue	Blue	75 lm/m	24 v	15 w	84	83.3mm	10m	120°
ILFX50-24-15W-120-H-Yellow	Yellow	480 lm/m	24 v	15 w	84	83.3mm	10m	120°
ILFX50-24-15W-120-H-Pink	Pink	300 lm/m	24 v	15 w	84	83.3mm	10m	120°












ILFX50-24V-15W-120-H-TW: TUNABLE WHITE



Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX50-24-15W-120-H-TW-822	2200K+5700k	145+296 lm/m	24 v	12 w	120	100mm	10m	120°
ILFX50-24-15W-120-H-TW-827	2700K+5700k	130+253 lm/m	24 v	12 w	120	100mm	10m	120°
ILFX50-24-15W-120-H-TW-830	3000K+5700k	142+296 lm/m	24 v	12 w	120	100mm	10m	120°

ILFX50-24V-13W-120-H-RGB: RGBW

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX50-24-17W-120-H-RGBW-Red	Red	25 lm/m	24 v	17 w	60	100mm	8m	120°
ILFX50-24-17W-120-H-RGBW-Green	Green	80 lm/m	24 v	17 w	60	100mm	8m	120°
ILFX50-24-17W-120-H-RGBW-Blue	Blue	14 lm/m	24 v	17 w	60	100mm	8m	120°

More options available upon request. Please contact us for further information.

-  Silicone
-  IP68
-  Vertical Bend
-  120° Beam
-  120mm Min Bend
-  3SDCM
-  Operating Temp
-40°C to 55°C
-  0.43kg/m
-  DALI, 0-10V,
DMX, Triac
-  CRI
>80+
(>90 also available upon request)
-  5 Years
Warranty

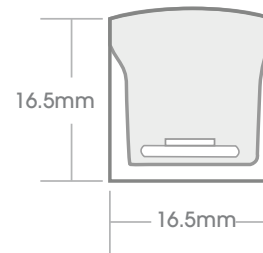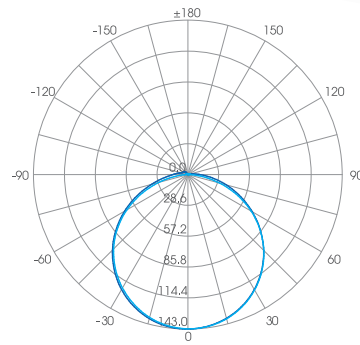

ILFX60-24V-9W-120-V: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX60-24-9W-120-V-822	2200K	228 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-827	2700K	280 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-830	3000K	300 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-835	3500K	314 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-840	4000K	320 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-850	5000K	340 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-865	6500K	352 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-Amber	Amber	70 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-Blue	Blue	26 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-Green	Green	259 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-Orange	Orange	75 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-Pink	Pink	102 lm/m	24 v	9 w	120	100mm	10m	120°
ILFX60-24-9W-120-V-Red	Red	83 lm/m	24 v	9 w	120	100mm	10m	120°

ILFX60-24V-10W-120-V: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX60-24-10W-120-V-822	2200K	327 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-827	2700K	330 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-830	3000K	350 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-835	3500K	360 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-840	4000K	390 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-845	4500K	446 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-850	5000K	430 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-865	6500K	410 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-Amber	Amber	108 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-Blue	Blue	38 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-Green	Green	302 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-Orange	Orange	291 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-Pink	Pink	175 lm/m	24 v	10 w	144	83.3mm	10m	120°
ILFX60-24-10W-120-V-Red	Red	110 lm/m	24 v	10 w	144	83.3mm	10m	120°

ILFX60-24V-12W-120-V-TW: TUNABLE WHITE

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX60-TW-24-12W-120-V-822	2200K+5700K	263+294 lm/m	24 v	12 w	120	100mm	10m	120°
ILFX60-TW-24-12W-120-V-927	2700K+5700K	333+304 lm/m	24 v	12 w	120	100mm	10m	120°
ILFX60-TW-24-12W-120-V-830	3000K+5700K	272+278 lm/m	24 v	12 w	120	100mm	10m	120°

ILFX60-24V-13W-120-V-RGB: RGB

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX60-24-13W-120-V-RGB-Red	Red	40 lm/m	24 v	13 w	72	83.3mm	10m	120°
ILFX60-24-13W-120-V-RGB-Green	Green	104 lm/m	24 v	13 w	72	83.3mm	10m	120°
ILFX60-24-13W-120-V-RGB-Blue	Blue	19 lm/m	24 v	13 w	72	83.3mm	10m	120°

ILFX60-24V-17W-120-V-RGBW: RGBW

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX60-24-17W-120-V-RGBW-Red	Red	13 lm/m	24 v	17 w	72	83.3mm	8m	120°
ILFX60-24-17W-120-V-RGBW-Green	Green	150 lm/m	24 v	17 w	72	83.3mm	8m	120°
ILFX60-24-17W-120-V-RGBW-Blue	Blue	24 lm/m	24 v	17 w	72	83.3mm	8m	120°
ILFX60-24-17W-120-V-RGBW-927	2700K	163 lm/m	24 v	17 w	72	83.3mm	8m	120°
ILFX60-24-17W-120-V-RGBW-930	3000K	200 lm/m	24 v	17 w	72	83.3mm	8m	120°
ILFX60-24-17W-120-V-RGBW-940	4000K	215 lm/m	24 v	17 w	72	83.3mm	8m	120°
ILFX60-24-17W-120-V-RGBW-950	5000K	191 lm/m	24 v	17 w	72	83.3mm	8m	120°

ILFX60-24V-14W-120-V-RGB-DMX: DYNAMIC COLOUR CONTROL

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX60-24-14W-120-V-RGB-DMX-Red	Red	59 lm/m	24 v	14 w	70	100mm	8m	120°
ILFX60-24-14W-120-V-RGB-DMX-Green	Green	145 lm/m	24 v	14 w	70	100mm	8m	120°
ILFX60-24-14W-120-V-RGB-DMX-Blue	Blue	23 lm/m	24 v	14 w	70	100mm	8m	120°
ILFX60-24-14W-120-V-RGB-DMX-830	3000K	429 lm/m	24 v	14 w	70	100mm	8m	120°

ILFX60-24V-18W-120-V-RGBW-DMX: RGB DYNAMIC COLOUR CONTROL

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX60-24-18W-120-V-RGBW-DMX-Red	Red	60 lm/m	24 v	18 w	70	100mm	8m	120°
ILFX60-24-18W-120-V-RGBW-DMX-Green	Green	176 lm/m	24 v	18 w	70	100mm	8m	120°
ILFX60-24-18W-120-V-RGBW-DMX-Blue	Blue	34 lm/m	24 v	18 w	70	100mm	8m	120°
ILFX60-24-18W-120-V-RGBW-DMX-827	2700K	196 lm/m	24 v	18 w	70	100mm	8m	120°
ILFX60-24-18W-120-V-RGBW-DMX-830	3000K	193 lm/m	24 v	18 w	70	100mm	8m	120°
ILFX60-24-18W-120-V-RGBW-DMX-840	4000K	200 lm/m	24 v	18 w	70	100mm	8m	120°
ILFX60-24-18W-120-V-RGBW-DMX-850	5000K	210 lm/m	24 v	18 w	70	100mm	8m	120°

ILLURE

FLEX 70

RANGE: H²O FLEX LED



Silicone



IP68



Horizontal Bend



120° Beam



150mm Min Bend



3SDCM



Operating Temp
-40°C to 55°C



0.43kg/m





DALI, 0-10V,
DMX, Triac



>80+
(>90 also available upon request)





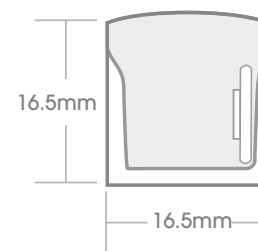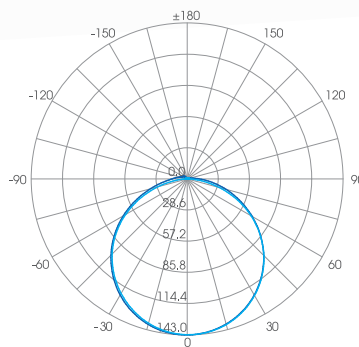








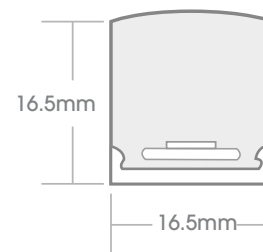
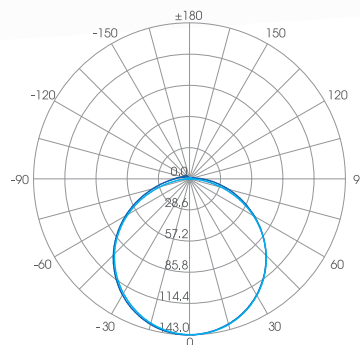
5 Years
Warranty



ILFX70-24V-10W-120-H: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX70-24-10W-120-H-822	2200K	350 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-827	2700K	400 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-830	3000K	389 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-835	3500K	394 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-840	4000K	411 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-845	4500K	500 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-850	5000K	407 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-865	6500K	399 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-Red	Red	51 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-Green	Green	290 lm/m	24 v	10 w	120	100mm	5m	120°
ILFX70-24-10W-120-H-Blue	Blue	122 lm/m	24 v	10 w	120	100mm	5m	120°

-  Silicone
-  IP68
-  Vertical Bend
-  210° Beam
-  120mm Min Bend
-  3SDCM
-  Operating Temp
-40°C to 55°C
-  0.43kg/m
-  DALI, 0-10V,
DMX, Triac
-  CRI
>80+
(>90 also available upon request)
-  5 Years
Warranty



ILFX80-24V-9W-210-V: STATIC COLOUR

Code	CCT	LED output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	BEAM
ILFX80-24-9W-210-V-822	2200K	207 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-827	2700K	386 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-830	3000K	457 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-835	3500K	601 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-840	4000K	568 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-850	5000K	540 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-865	6500K	557 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-Amber	Amber	112 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-Blue	Blue	35 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-Green	Green	409 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-Orange	Orange	80 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-Pink	Pink	156 lm/m	24 v	9 w	120	100mm	10m	210°
ILFX80-24-9W-210-V-Red	Red	125 lm/m	24 v	9 w	120	100mm	10m	210°

ILFX80-24V-15W-210-V: STATIC COLOUR

Code	CCT	LED output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	BEAM
ILFX80-24-15W-210-V-822	2200K	930 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-827	2700K	950 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-830	3000K	977 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-835	3500K	985 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-840	4000K	990 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-850	5000K	1000 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-865	6500K	1050 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-Blue	Blue	90 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-Green	Green	500 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-Pink	Pink	300 lm/m	24 v	15 w	84	83.3mm	10m	210°
ILFX80-24-15W-210-V-Yellow	Yellow	420 lm/m	24 v	15 w	84	83.3mm	10m	210°

ILFX80-24V-12W-210-V-TW: TUNABLE WHITE












Code	CCT	LED output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX80-24-12W-210-V-TW-822	2200K+5700K	348+395 lm/m	24 v	12 w	120	100mm	10m	210°
ILFX80-24-12W-210-V-TW-827	2700K+5700K	334+400 lm/m	24 v	12 w	120	100mm	10m	210°
ILFX80-24-12W-210-V-TW-830	3000K+5700K	347+363 lm/m	24 v	12 w	120	100mm	10m	210°



ILFX80-24V-13W-210-V-RGB: RGB

Code	CCT	LED output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX80-24-13W-210-V-RGB-Red	Red	66 lm/m	24 v	13 w	72	83.3mm	10 m	210°
ILFX80-24-13W-210-V-RGB-Green	Green	178 lm/m	24 v	13 w	72	83.3mm	10 m	210°
ILFX80-24-13W-210-V-RGB-Blue	Blue	35 lm/m	24 v	13 w	72	83.3mm	10 m	210°

ILFX80-24V-17W-210-V-RGBW: RGBW

Code	CCT	LED output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX80-24-17W-210-V-RGBW-Red	Red	64 lm/m	24 v	17 w	72	83.3mm	8 m	210°
ILFX80-24-17W-210-V-RGBW-Green	Green	269 lm/m	24 v	17 w	72	83.3mm	8 m	210°
ILFX80-24-17W-210-V-RGBW-Blue	Blue	52 lm/m	24 v	17 w	72	83.3mm	8 m	210°
ILFX80-24-17W-210-RGB-V-RGBW-927	RGBW (2700K)	336 lm/m	24 v	17 w	72	83.3mm	8 m	210°
ILFX80-24-17W-210-RGB-V-RGBW-930	RGBW (3000K)	332 lm/m	24 v	17 w	72	83.3mm	8 m	210°
ILFX80-24-17W-210-RGB-V-RGBW-940	RGBW (4000K)	393 lm/m	24 v	17 w	72	83.3mm	8 m	210°
ILFX80-24-17W-210-RGB-V-RGBW-950	RGBW (5000K)	363 lm/m	24 v	17 w	72	83.3mm	8 m	210°

-  Silicone
-  IP68
-  Horizontal Bend
-  270° Beam
-  80mm Min Bend
-  3SDCM
-  Operating Temp
-40°C to 55°C
-  0.52kg/m
-  DALI, 0-10V,
DMX, Triac
-  >80+
(>90 also available upon request)
-  5 Years
Warranty

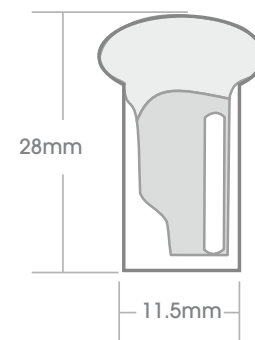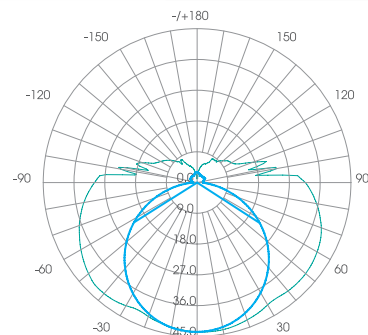

ILFX90-24V-5W-270-H: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX90-24-5W-270-H-822	2200K	141 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-827	2700K	143 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-830	3000K	145 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-835	3500K	150 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-840	4000K	157 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-845	4500K	178 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-850	5000K	150 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-865	6500K	140 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-Amber	Amber	48 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-Blue	Blue	18 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-Green	Green	122 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-Orange	Orange	32 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-Pink	Pink	48 lm/m	24 v	5 w	72	166.7mm	15m	270°
ILFX90-24-5W-270-H-Red	Red	42 lm/m	24 v	5 w	72	166.7mm	15m	270°

ILFX90-24V-12W-270-H: STATIC COLOUR

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX90-24-12W-270-H-822	2200K	250 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-827	2700K	250 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-830	3000K	250 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-835	3500K	300 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-840	4000K	376 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-845	4500K	268 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-850	5000K	360 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-865	6500K	320 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-Blue	Blue	30 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-Green	Green	303 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-Yellow	Yellow	151 lm/m	24 v	12 w	60	100mm	10m	270°
ILFX90-24-12W-270-H-Pink	Pink	112 lm/m	24 v	12 w	60	100mm	10m	270°

ILFX90-24V-12W-270-H-TW: TUNABLE WHITE

Code	CCT	LED output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX90-24-12W-270-H-TW-822	2200K+5700K	199+223 lm/m	24 v	12 w	120	100mm	10m	270°
ILFX90-24-12W-270-H-TW-827	2700K+5700K	232+225 lm/m	24 v	12 w	120	100mm	10m	270°
ILFX90-24-12W-270-H-TW-830	3000K+5700K	224+237 lm/m	24 v	12 w	120	100mm	10m	270°

ILFX90-24V-17W-270-H-RGBW: RGBW

Code	CCT	LED output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX90-24-17W-270-H-RGBW-Red	Red	25 lm/m	24 v	17 w	72	83.3mm	8 m	270°
ILFX90-24-17W-270-H-RGBW-Green	Green	100 lm/m	24 v	17 w	72	83.3mm	8 m	270°
ILFX90-24-17W-270-H-RGBW-Blue	Blue	18 lm/m	24 v	17 w	72	83.3mm	8 m	270°
ILFX90-24-17W-270-V-RGBW-827	RGBW (2700K)	129 lm/m	24 v	17 w	72	83.3mm	8 m	270°
ILFX90-24-17W-270-V-RGBW-830	RGBW (3000K)	134 lm/m	24 v	17 w	72	83.3mm	8 m	270°
ILFX90-24-17W-270-V-RGBW-840	RGBW (4000K)	171 lm/m	24 v	17 w	72	83.3mm	8 m	270°
ILFX90-24-17W-270-V-RGBW-850	RGBW (5000K)	158 lm/m	24 v	17 w	72	83.3mm	8 m	270°

ILFX90-24V-18W-270-H-RGBW-DMX: RGBW DYNAMIC COLOUR CONTROL

Code	CCT	LED Output	Input Voltage	Watts/M	Chips/M	Cutting Length	Max Length	Beam
ILFX90-24-18W-270-H-RGBW-DMX-Red	Red	28 lm/m	24 v	18 w	70	100mm	8m	270°
ILFX90-24-18W-270-H-RGBW-DMX-Green	Green	94 lm/m	24 v	18 w	70	100mm	8m	270°
ILFX90-24-18W-270-H-RGBW-DMX-Blue	Blue	17 lm/m	24 v	18 w	70	100mm	8m	270°
ILFX90-24-18W-270-H-RGBW-DMX-827	2700K	122 lm/m	24 v	18 w	70	100mm	8m	270°
ILFX90-24-18W-270-H-RGBW-DMX-830	3000K	130 lm/m	24 v	18 w	70	100mm	8m	270°
ILFX90-24-18W-270-H-RGBW-DMX-840	4000K	151 lm/m	24 v	18 w	70	100mm	8m	270°
ILFX90-24-18W-270-H-RGBW-DMX-850	5000K	139 lm/m	24 v	18 w	70	100mm	8m	270°

ILLURE